

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: http://www.apracings.com

© AP Racing Ltd. 2005

CP3047-66 R.H AS DRAWN
CP3047-67 L.H OPPOSITE


THIS IS A 24 VANE DISC
APPROX DISC WEIGHT = 4.2kg

THIS DISC HAS BEEN DESIGNED TO WORK WITH A
PAD SWEPT DEPTH OF D49



SUFFIX TO DISC PART NUMBERS:

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
G ⁿ	'STRAIGHT GROOVE' - VALUE 'n' SPECIFIES NO. OF GROOVES PER FACE EG. G4 SPECIFIES 4 GROOVES PER FACE
CG ⁿ	'CURVED GROOVE' - VALUE 'n' SPECIFIES NO. OF GROOVES PER FACE EG. CG8 SPECIFIES 8 GROOVES PER FACE

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE A P RACING BRAKE CALIPER CATALOGUE

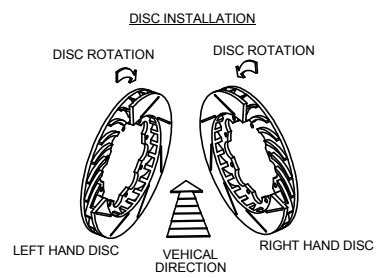

ISSUE No.	Alterations		Zone	Initials
	Date & No.	Particulars		
40	07/04/06 B4460	UPDATED WITH CURRENT GROOVE TYPES CONVERTED TO TWIN TURN 0.20/0.00 STEP ADDED Ø201.47 ADDED	2K	SAT

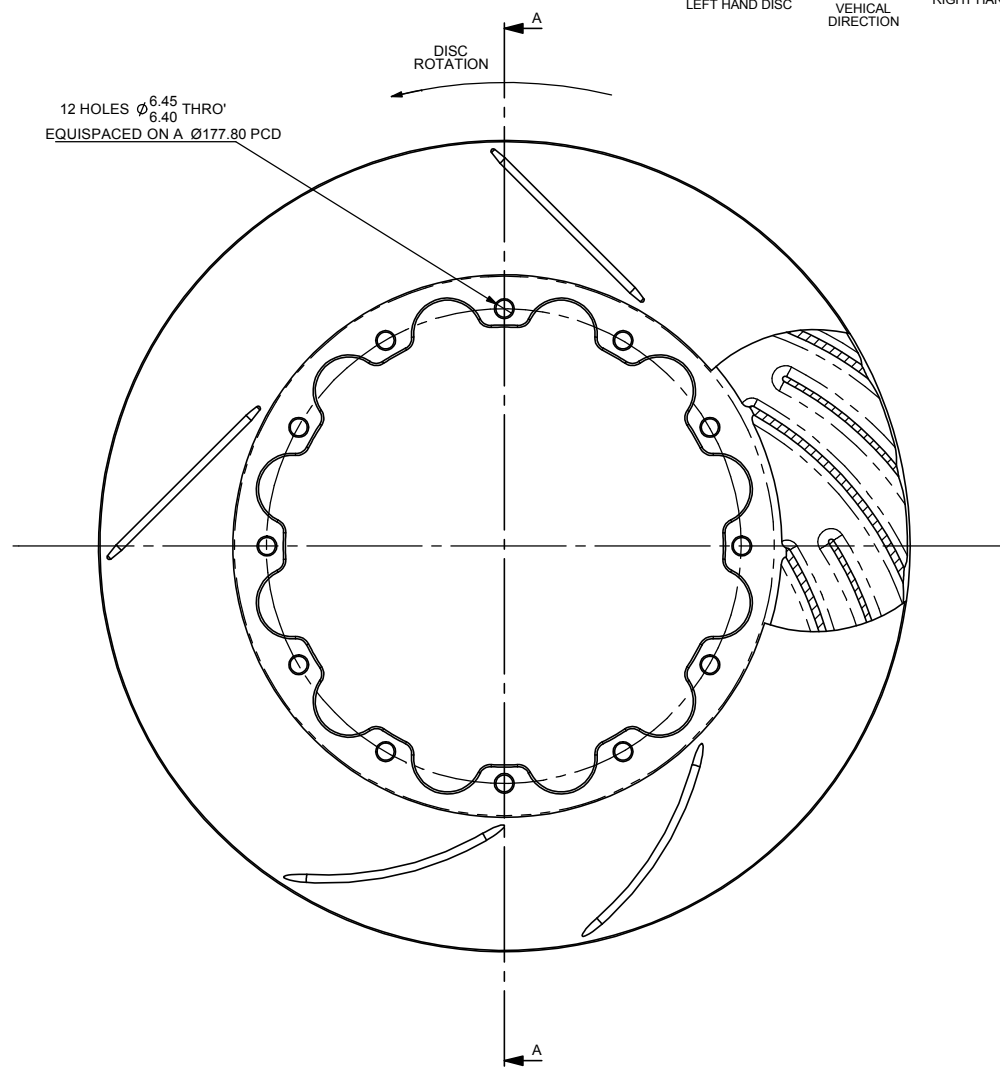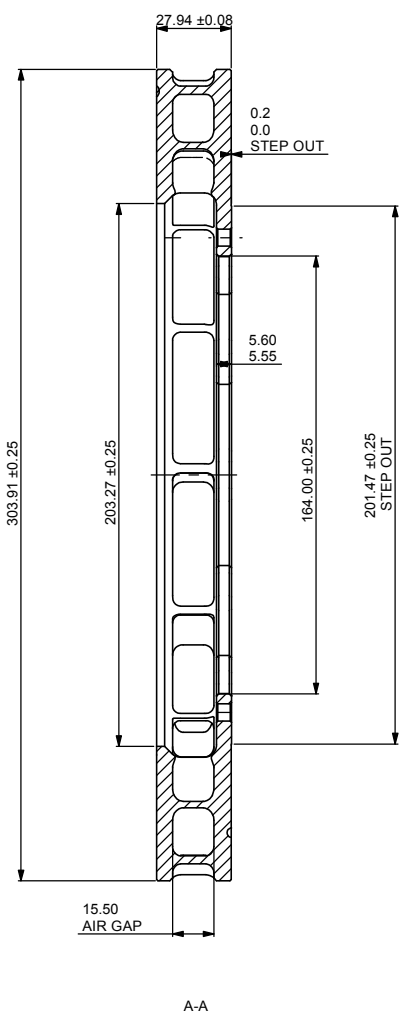

SCALE 1:1	SHEET 1 OF 1
DRAWN	Steve Thomas
APPROVED	
DERIVED FROM	
TITLE	
Ø303.91 x 27.94 VENTILATED DISC	
DRG NO.	CP3047-66/67