

A1 ASSEMBLY DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: http://www.apracings.com

© AP Racing Ltd. 2005

DISC PART NUMBERS:
CP5772-6084 RH AS SHOWN
CP5772-6085 LH OPPOSITE

THIS IS A 72 VANES DISC OF MASS 6.04 KG.




SUFFIX TO DISC PART NUMBERS:

- SUFFIX DETAILS
- P PLAIN, NO GROOVES
 - CGnn CURVED GROOVES AS SHOWN, VALUE nn PER FACE.
eg CG24 MEANS 24 CURVED GROOVES PER FACE.
 - GA 20 'J HOOK' GROOVES PER FACE AS SHOWN

THIS DISC WAS DESIGNED TO WORK WITH A D48 DEPTH PAD.

USE BOBBIN No. CP4135-104FD WITH CP3819-108 KAYLOCK NUT TO ACHIEVE 0.40 NOM FLOAT.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

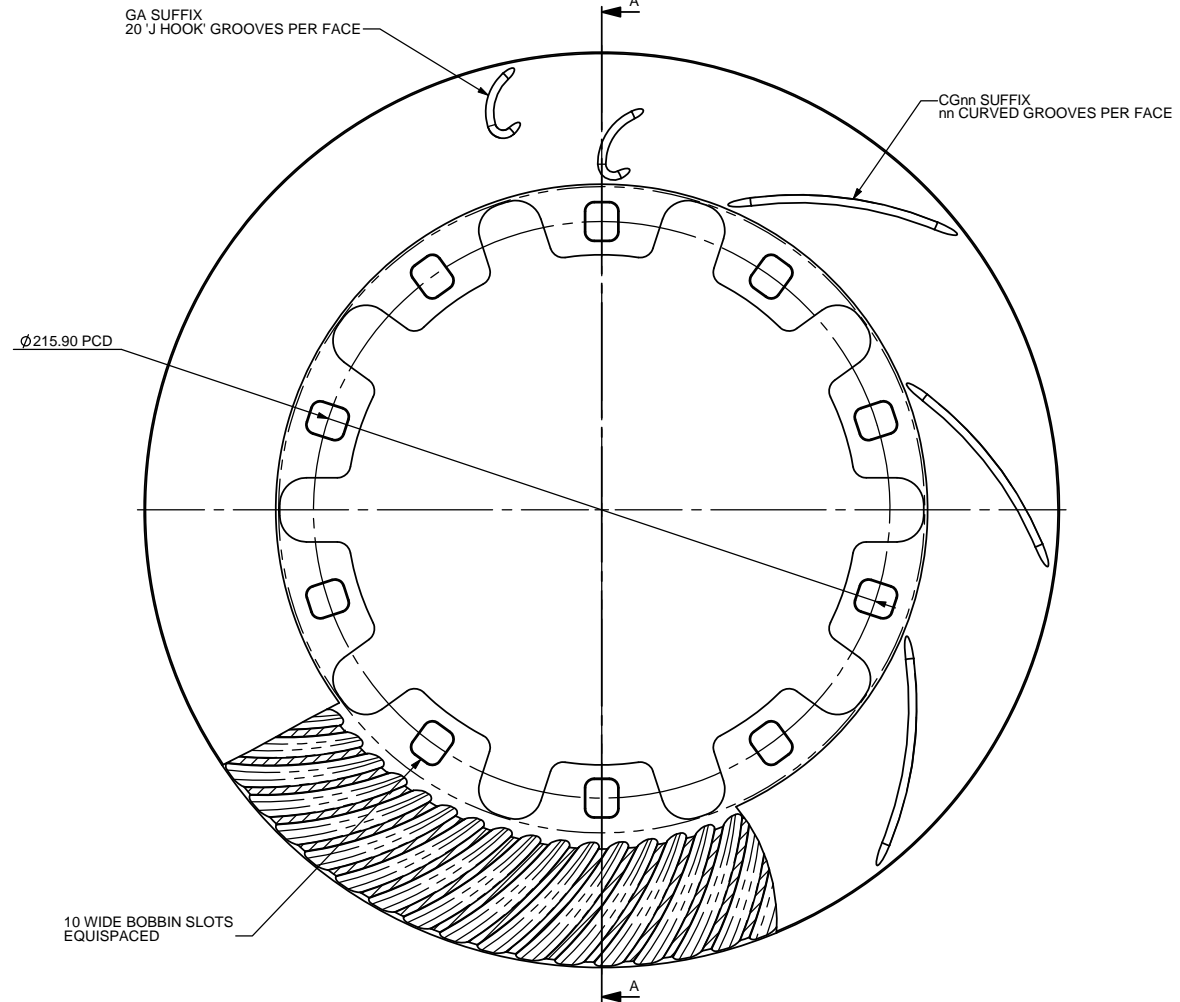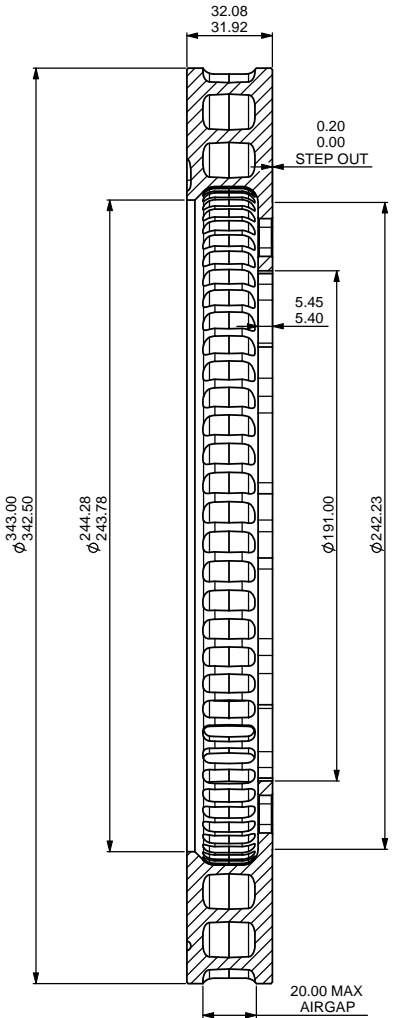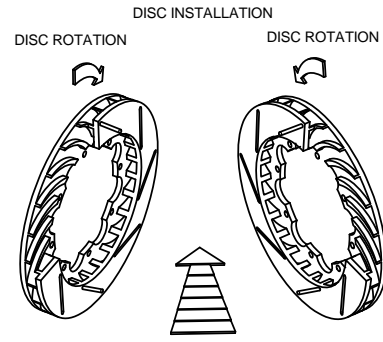

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
1	20/06/11 B6249	FIRST ISSUE		

SCALE 1:1		SHEET 1 OF 1	
DRAWN	NICK STEVENS		
APPROVED	#		
DERIVED FROM			
TITLE			
Ø343 x 32 VENTILATED DISC			
DRG NO.	CP5772-6084 / 6085		