



# B1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.


AP Racing  
Wheler Road  
Coventry  
CV3 4LB  
Tel: +44 024 7663 9595  
Fax: +44 024 7663 9559  
e-mail: sales@apracings.co.uk  
Web site: HTTP://www.apracings.com

© AP Racing Ltd. 2022

FOR CALIPERS WITH '01A' TO '01L' IN PART NUMBER SUFFIX IN POSITION SHOWN, SEE DETAIL B. USE THE FOLLOWING PARTS:  
 PAD SUPPORTS - CP6269-104  
 LEADING PAD ABUTMENT PLATES - CP6269-102  
 TRAILING PAD ABUTMENT PLATES - CP6269-103

FOR CALIPERS WITH PART NUMBER SUFFIX '01M' AND ONWARDS USE THE FOLLOWING PARTS:  
 PAD SUPPORTS - CP6269-114  
 LEADING PAD ABUTMENT PLATES - CP6269-112  
 TRAILING PAD ABUTMENT PLATES - CP6269-113


DETAIL B  
SCALE 2.6 : 1

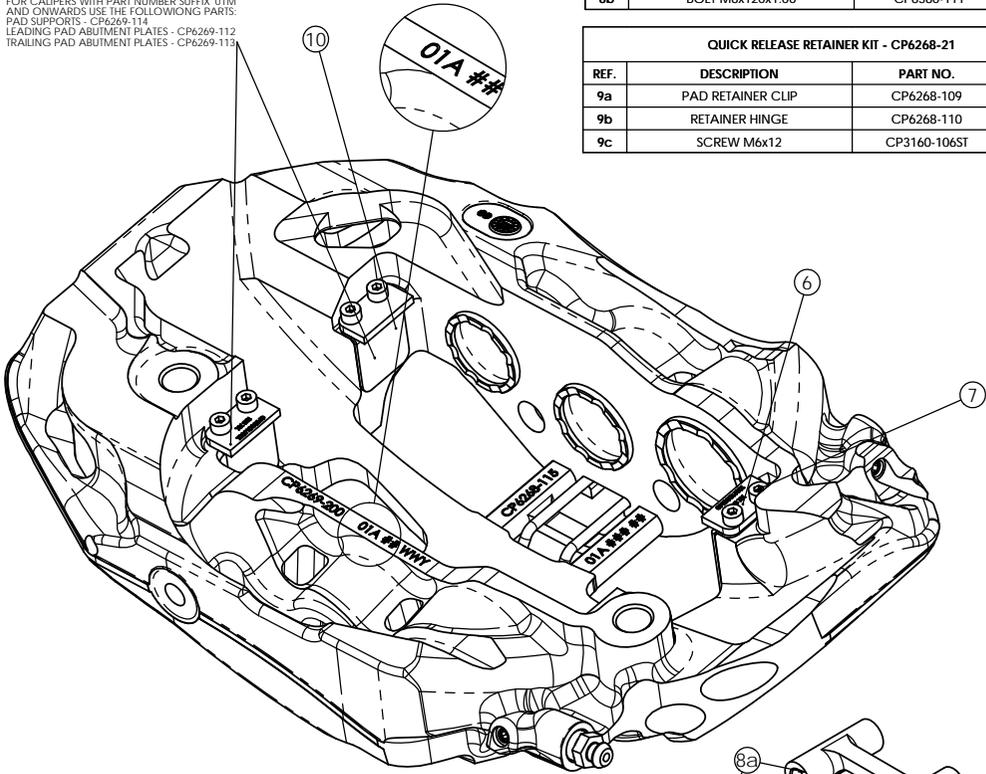

PAD RETAINER KIT - CP6268-20			
REF.	DESCRIPTION	PART NO.	QTY
8a	PAD RETAINER	CP6268-115	2
8b	BOLT M6x120x1.00	CP6360-111	2

QUICK RELEASE RETAINER KIT - CP6268-21			
REF.	DESCRIPTION	PART NO.	QTY
9a	PAD RETAINER CLIP	CP6268-109	1
9b	RETAINER HINGE	CP6268-110	1
9c	SCREW M6x12	CP3160-106ST	1

CP6269-2/3/5/7L SPARES				
REF	DESCRIPTION	PART NO.	QTY / ASSY	FITTING INSTRUCTIONS
1	Ø1 1/4" SST PISTON	CP6268-104	2	
2	Ø33.7MM SST PISTON	CP6268-105	2	
3	Ø1 5/8" SST PISTON	CP6268-106	2	
4	SEAL KIT (6 SEALS)	CP8518-EFK	1	REFER TO PUBLICATION REF: P14.290 & P14.220
5	BLEED SCREW KIT	CP3880-1	1	TIGHTENING TORQUE - 17Nm
6	PAD SUPPORT	CP6269-104	4	
		CP6269-114	4	
		SEE NOTE		
7	M4x0.7 SOCKET HEAD CAP SCREW	CP3215-115	8	APPLY A 1-2MM DROP OF LOCTITE 270 TO THE 2ND FROM LAST THREAD WHEN FITTING. TIGHTENING TORQUE 4Nm
10	PAD ABUTMENT PLATE	CP6269-102 LEADING	2	APPLY 736 RTV SILICONE SPARINGLY BEHIND THE ABUTMENT PLATE ENSURING ENTIRE CONTACT FACE IS COVERED APPLY PRESSURE TO ABUTMENT PLATE WHEN FITTING TO ENSURE MINIMUM FILM THICKNESS AND AVOID ANY GAP. ENSURE ABUTMENT PLATE SITS CORRECTLY AGAINST CALIPER BODY BEFORE FITTING RETAINING SCREWS
		CP6269-103 TRAILING OR	2	
		CP6269-112 LEADING CP6269-113 TRAILING	2	
		SEE NOTE		
11	7Lb AKB SPRING	CP4100-121	4	
12	7Lb AKB SPRING	CP2667-113	2	

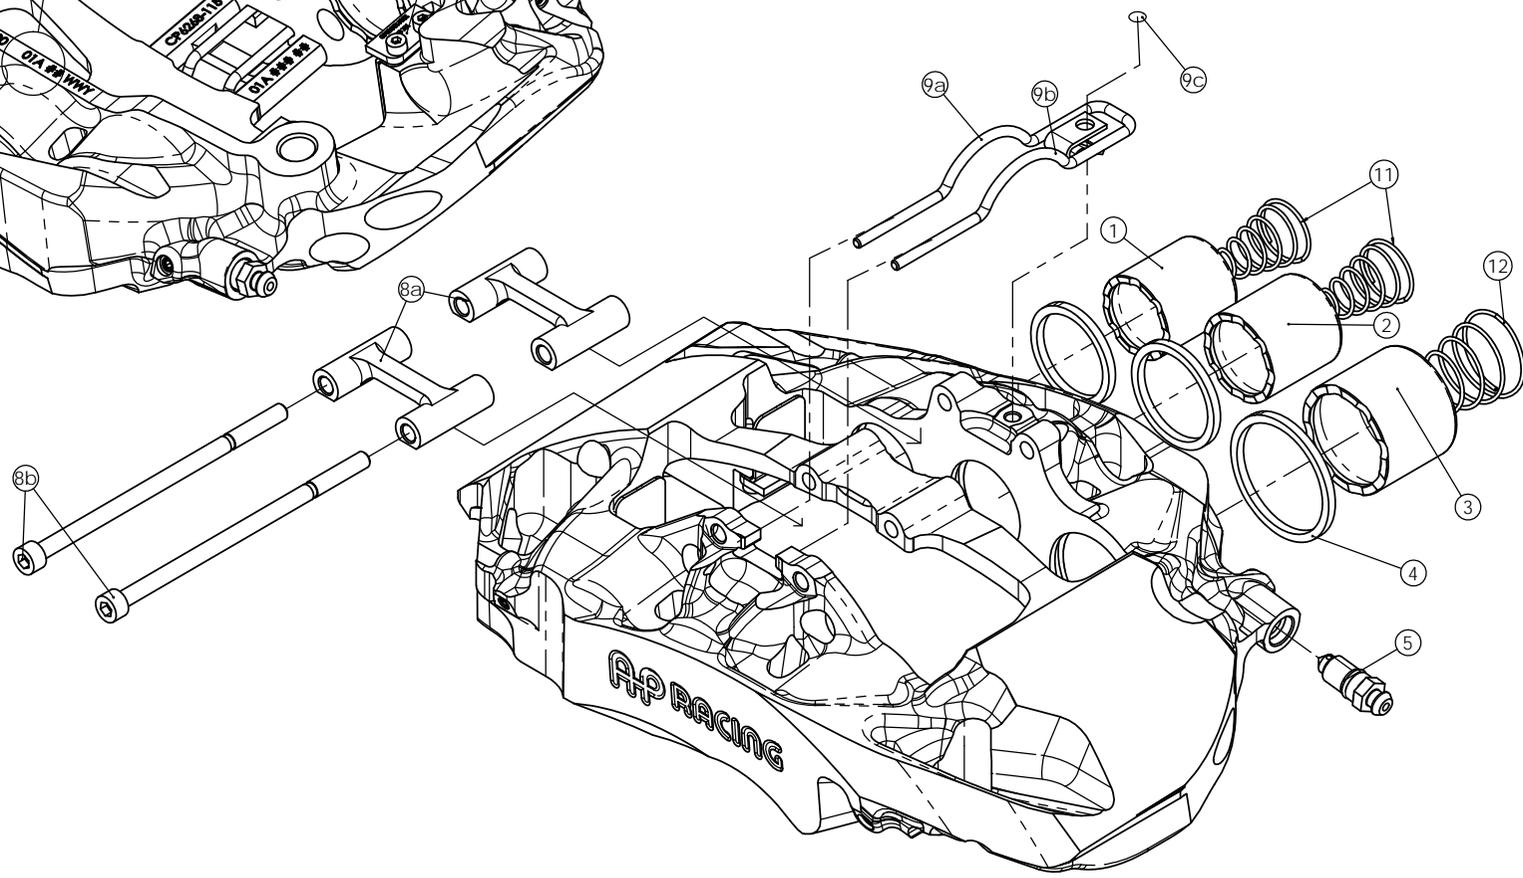

Alterations		
Date & No.	Particulars	Zone / Initials
	SEE SHEET 1 FOR ISSUE INFORMATION.	

SCALE 1:2 SHEET 2 OF 2

DRAWN Steve Thomas

APPROVED

DERIVED FROM

TITLE  
GT3 6 POT  
BRAKE CALIPER

DRG NO. CP6269-1CD