


CALIPER SPECIFICATION





BORE SIZE	27.00 X 31.75 X 38.10 (1.06" X 1.25" X 1.50")
PISTON AREA / PAD	25.2 SQ. CM
DISC DIA. MAX	362.00
DISC THICKNESS MAX	32.00
DISC THICKNESS MIN. (WORN CONDITION)	30.00 (DIFFERENTIAL WEAR NOT TO EXCEED 0.50MM SIDE TO SIDE)
WORKING PRESSURE MAX.	120 bar
HYDRAULIC FEED	M10 X 1.0
DRY WEIGHT (LESS PADS)	3.70kg
PAD FAMILY	CP7040
EFFECTIVE RADIUS (ON DIA. 330.00 DISC)	152.00
PL' DIMN.	68.80
OFFSET 'C' DIMN.	53.2
MTG. HOLE CENTRES 'D' DIMN.	152.00
PAD FRICTION MATERIAL MIN. THICKNESS	2.50
PAD RETENTION	2 X FRICTION RETAINED PINS
TIGHTENING TORQUES	BLEED SCREW : 17Nm HYDRAULIC FEED : 25Nm
CORROSION PROTECTION	FLUID RESISTANT PAINT FINISH - ALUMINIUM BODY BOOT TYPE DIRT SEALS

CALIPER IDENTIFICATION CHART


RHT	RIGHT HAND TRAILING (BEHIND AXLE)
LHT	LEFT HAND TRAILING (BEHIND AXLE)
RHL	RIGHT HAND TRAILING (IN FRONT OF AXLE)
LHL	LEFT HAND TRAILING (IN FRONT OF AXLE)

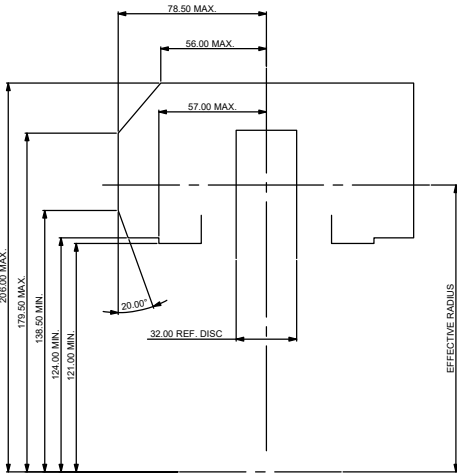

CALIPER RADIAL PROFILE
AS FITTED ON Ø362.00 DISC.

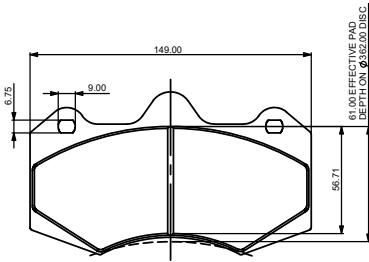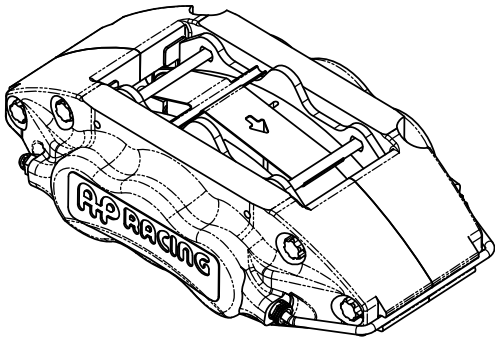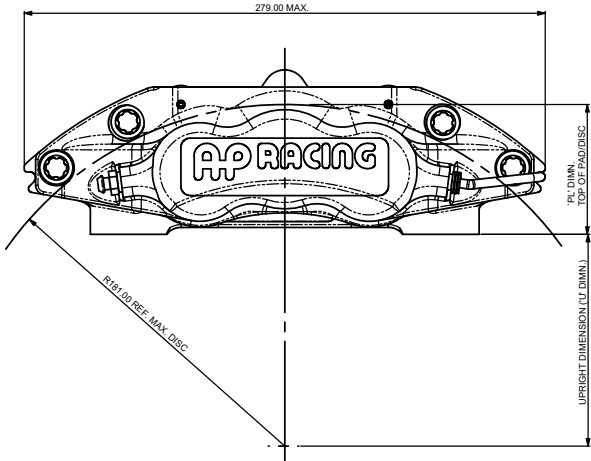

CP7040 PAD FAMILY
PAD AREA (MAX.) - 75 SQ. CM

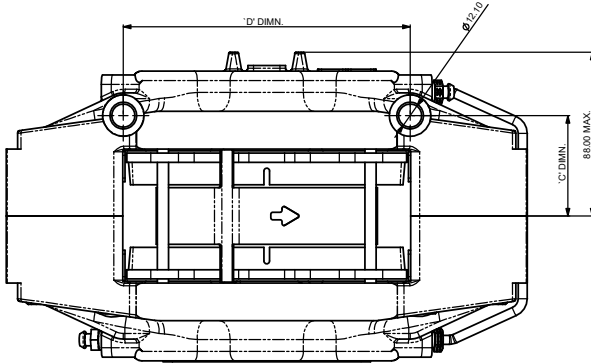

PART NUMBER	DESCRIPTION	COLOUR
CP7040-250BG19	RHT- SIDE FEED- NO ANTI KNOCK BACK SPRING	BLACK GLOSS
CP7040-250BK2		BLACK SEMI GLOSS
CP7040-250R38		RED BRIGHT GLOSS
CP7040-350BG19	LHT- SIDE FEED- NO ANTI KNOCK BACK SPRING	BLACK GLOSS
CP7040-350BK2		BLACK SEMI GLOSS
CP7040-350R38		RED BRIGHT GLOSS
CP7040-4ABK2	RHL- SIDE FEED- NO ANTI KNOCK BACK SPRING	BLACK SEMI GLOSS
CP7040-450R38		RED BRIGHT GLOSS
CP7040-5ABK2	LHL- SIDE FEED- NO ANTI KNOCK BACK SPRING	BLACK SEMI GLOSS
CP7040-550R38		RED BRIGHT GLOSS

SCALE 1:1	SHEET 1 OF 1
DRAWN	J SIMMONDS
APPROVED	
DERIVED FROM	#
PROJECT NO.	R0887
CLASS	2
SECTOR	ROAD BRAKES

TITLE
CALIPER INSTALLATION DRAWING
362 MAX.x32 DISC INSTALLATIONS

DRAWING NUMBER
CP7040-1CD