



IF THIS DOCUMENT IS PRINTED IN HARDCOPY,
IT IS FOR INFORMATION USE ONLY AND THEREFORE
IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS
REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



FIRST ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.





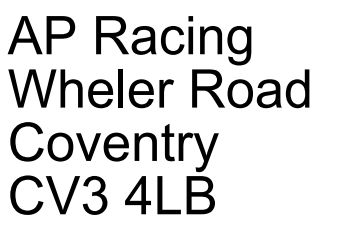


Tel: +44 024 7663 9595
Fax: +44 024 7663 9559
e-mail: sales@apracing.co.uk
Web site: [HTTP://www.apracing.co.uk](http://www.apracing.co.uk)

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
01	06/06/2019 R4501_05	FIRST ISSUE	#	DF
02	31/10/2019 R4501_13	COMPATABLE DISC TABLE REMOVED	02H	DF
		CALIPER MAX GWV TABLE ADDED	02H	
		LASER ETCHING DETAILS & ANTI-COUNTERFEIT LABEL LOCATION ADDED	14C 18C 16A	
03	08/11/2019 R4501_16	CALIPER MAX GWV TABLE UPDATED	02H	DF
		CALIPER MAX WORKING PRESSURE UPDATED WAS 130 BAR NOW 250 BAR	03G	
04	19/08/2022 R5010_02	'AVAILABLE COLOURS' REMOVED FROM SPEC TABLE.	M3	DKS
05	02/10/2025 WF-004908_01	CALIPER MAX GWV TABLE UPDATED.	H1	JP
		CALIPER MAX WORKING PRESSURE UPDATED. WAS 250bar NOW 190bar	G3	

AVAILABLE PART NUMBERS	
PART NUMBER	DESCRIPTION
CP9572-250##	RIGHT HAND TRAILING (BEHIND AXLE)
CP9572-350##	LEFT HAND TRAILING (BEHIND AXLE)
CP9572-450##	RIGHT HAND LEADING (IN FRONT OF AXLE)
CP9572-550##	LEFT HAND LEADING (IN FRONT OF AXLE)
## = COLOUR CODE	
FOR AVAILABLE COLOURS AND FURTHER TECHNICAL INFORMATION PLEASE REFER TO THE PRODUCT CATALOGUE, APRACING.COM OR CUSTOMER SERVICES	

MAXIMUM WORKING CALIPER PRESSURE	190 Bar (2750 Psi)
----------------------------------	--------------------

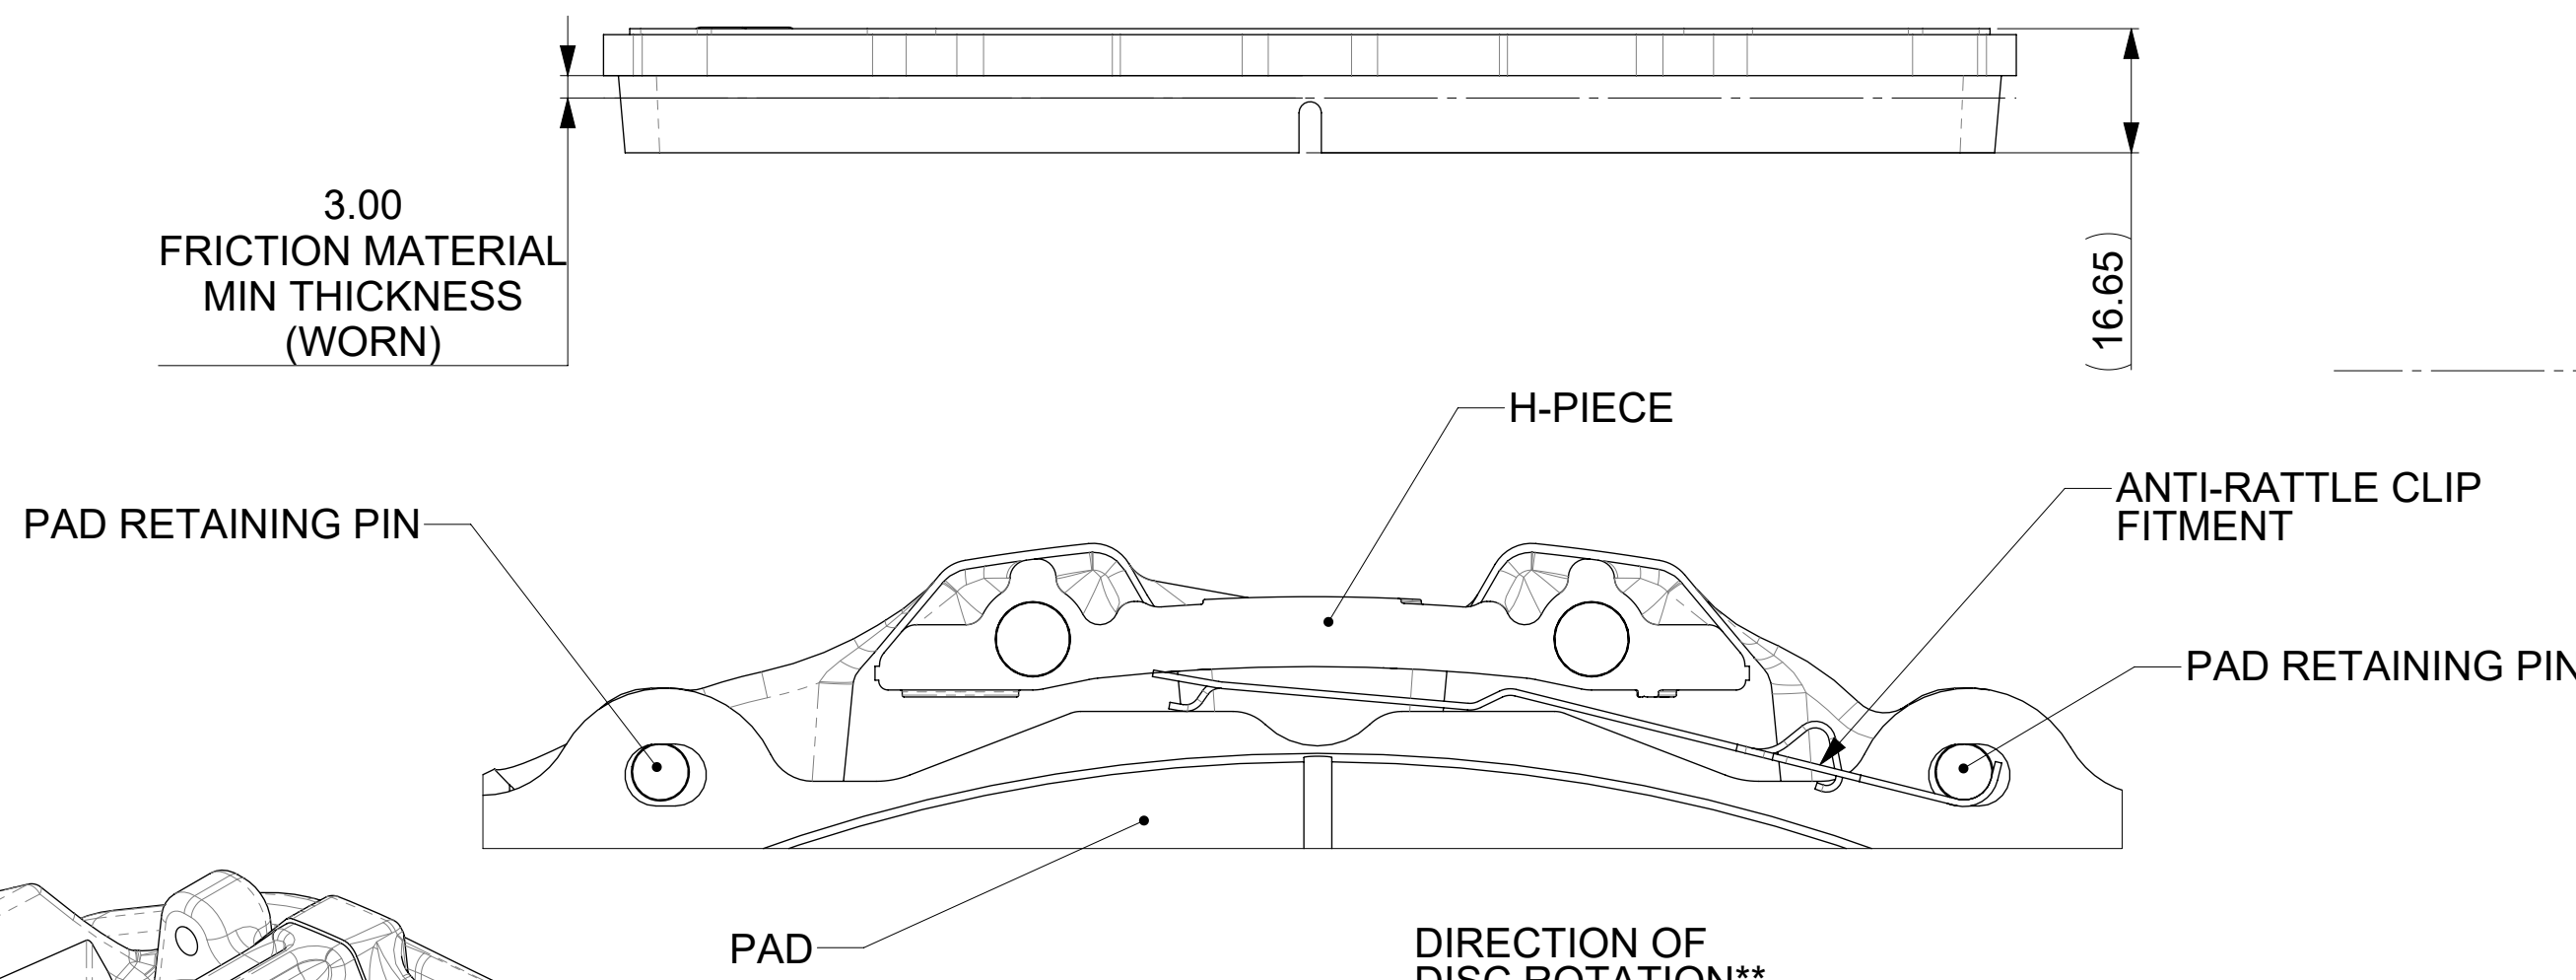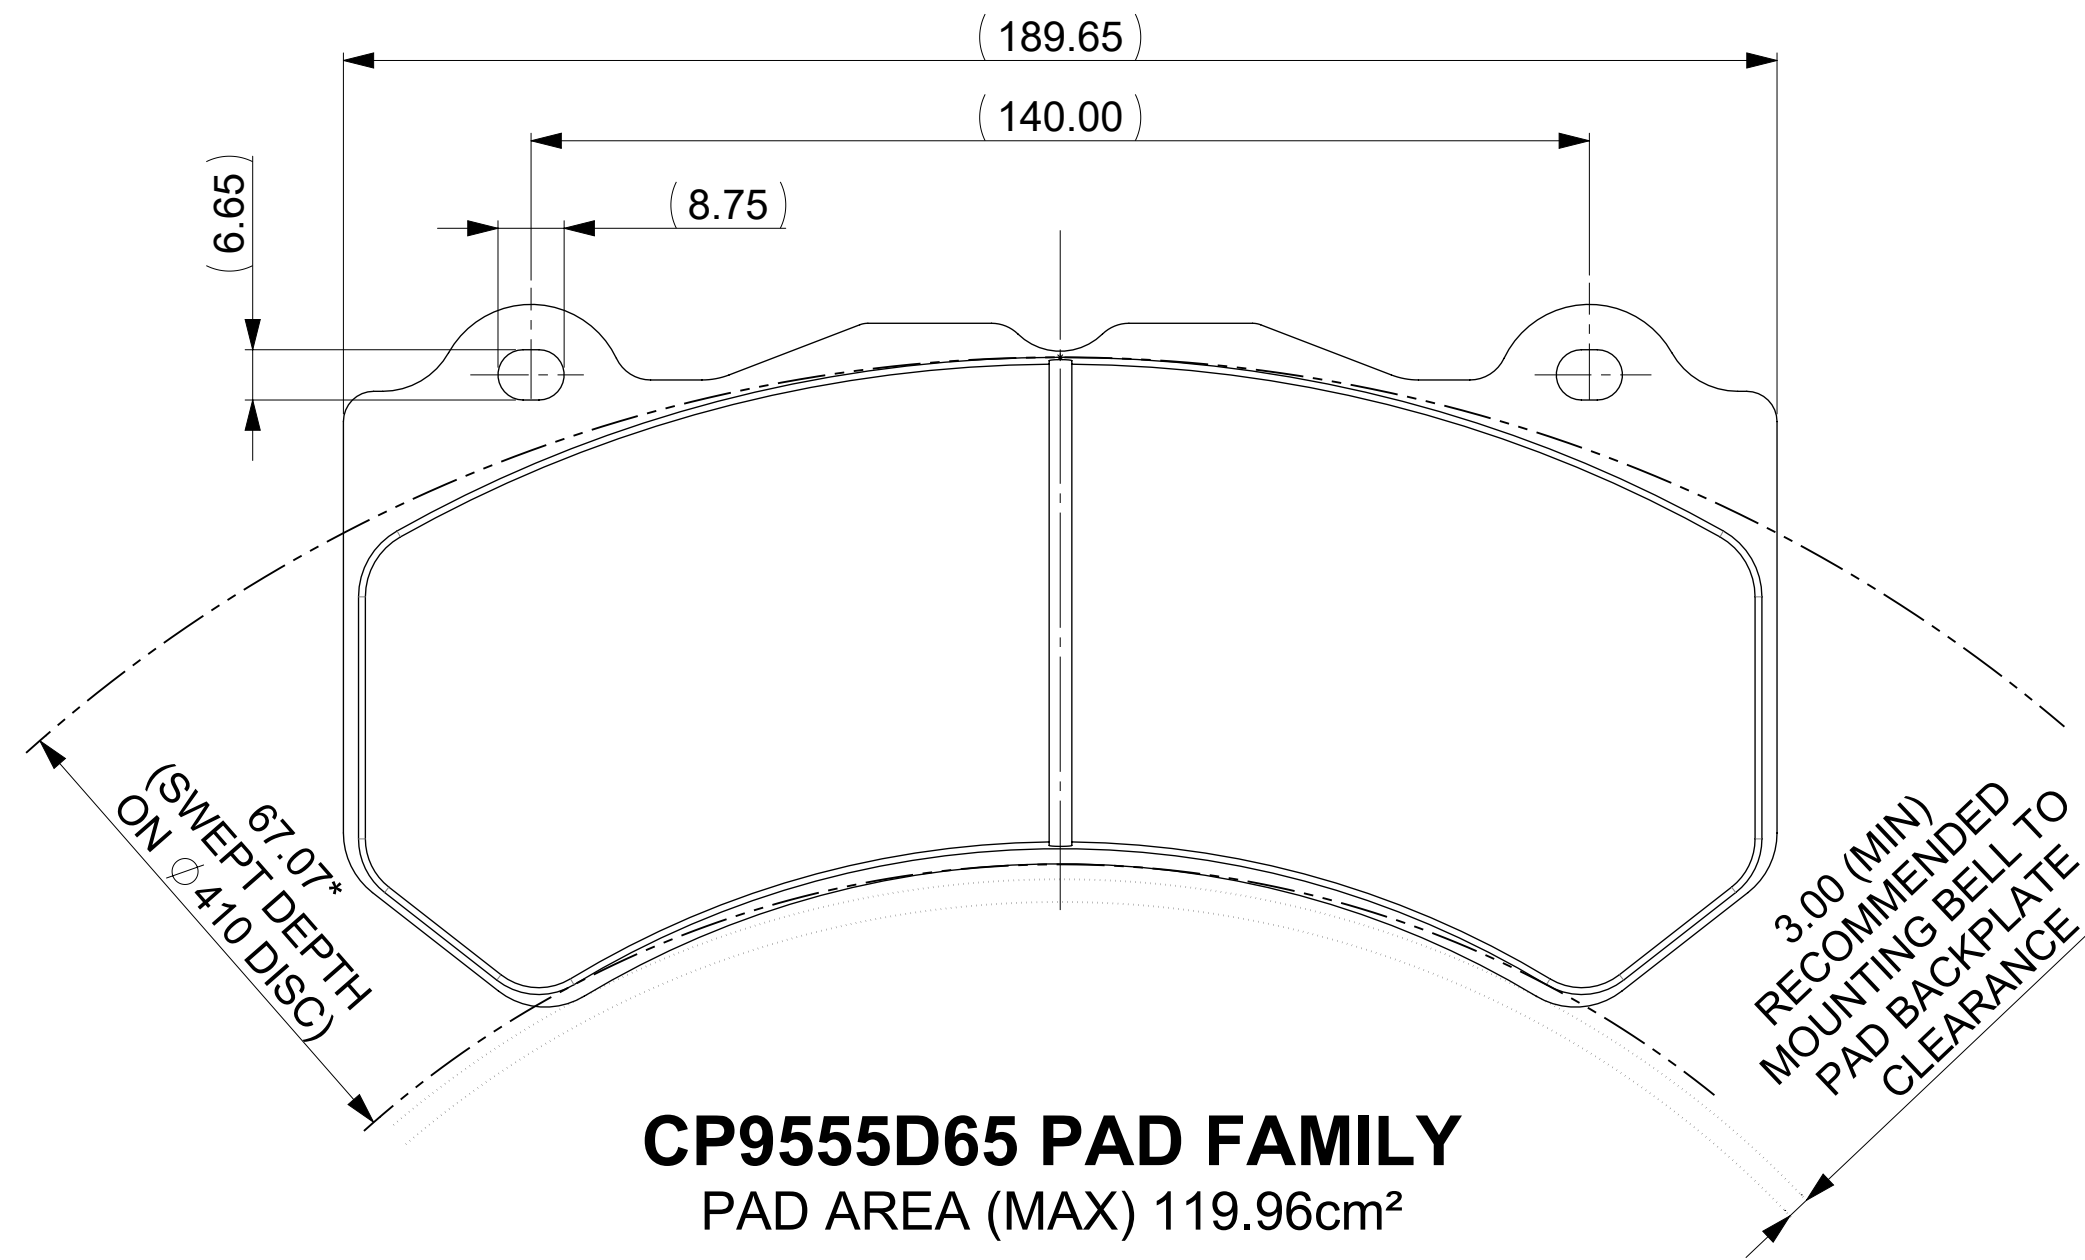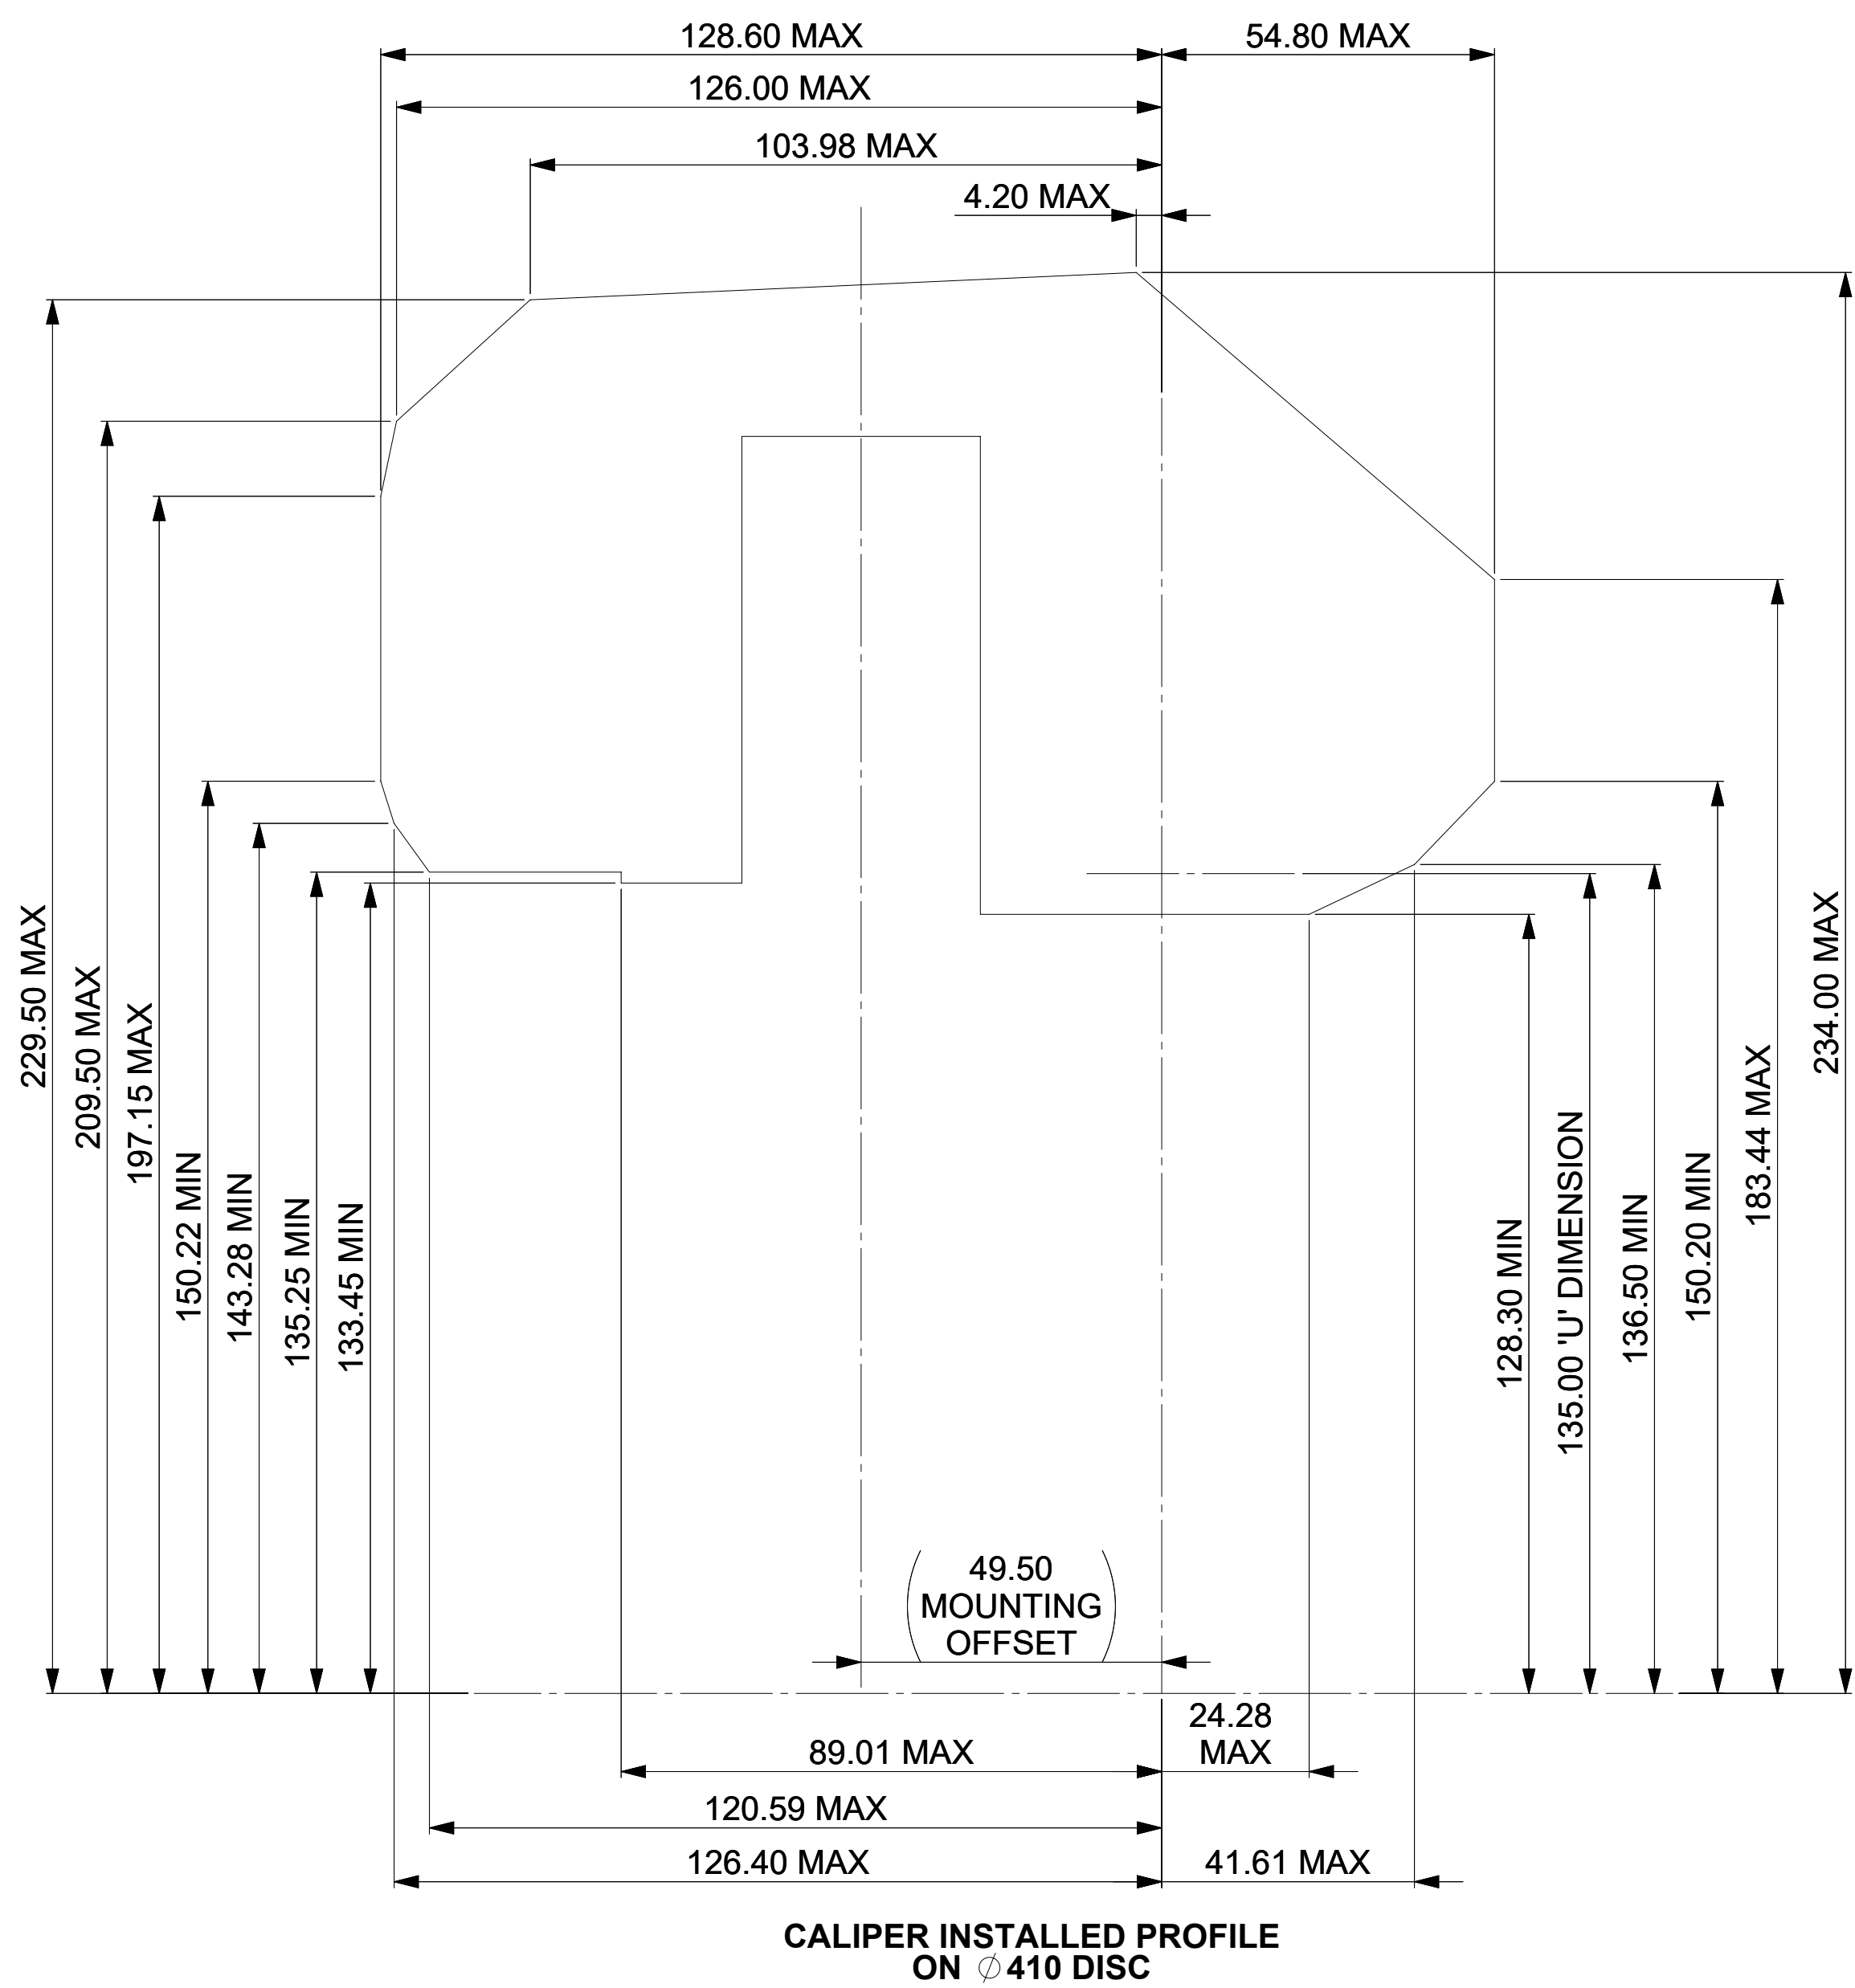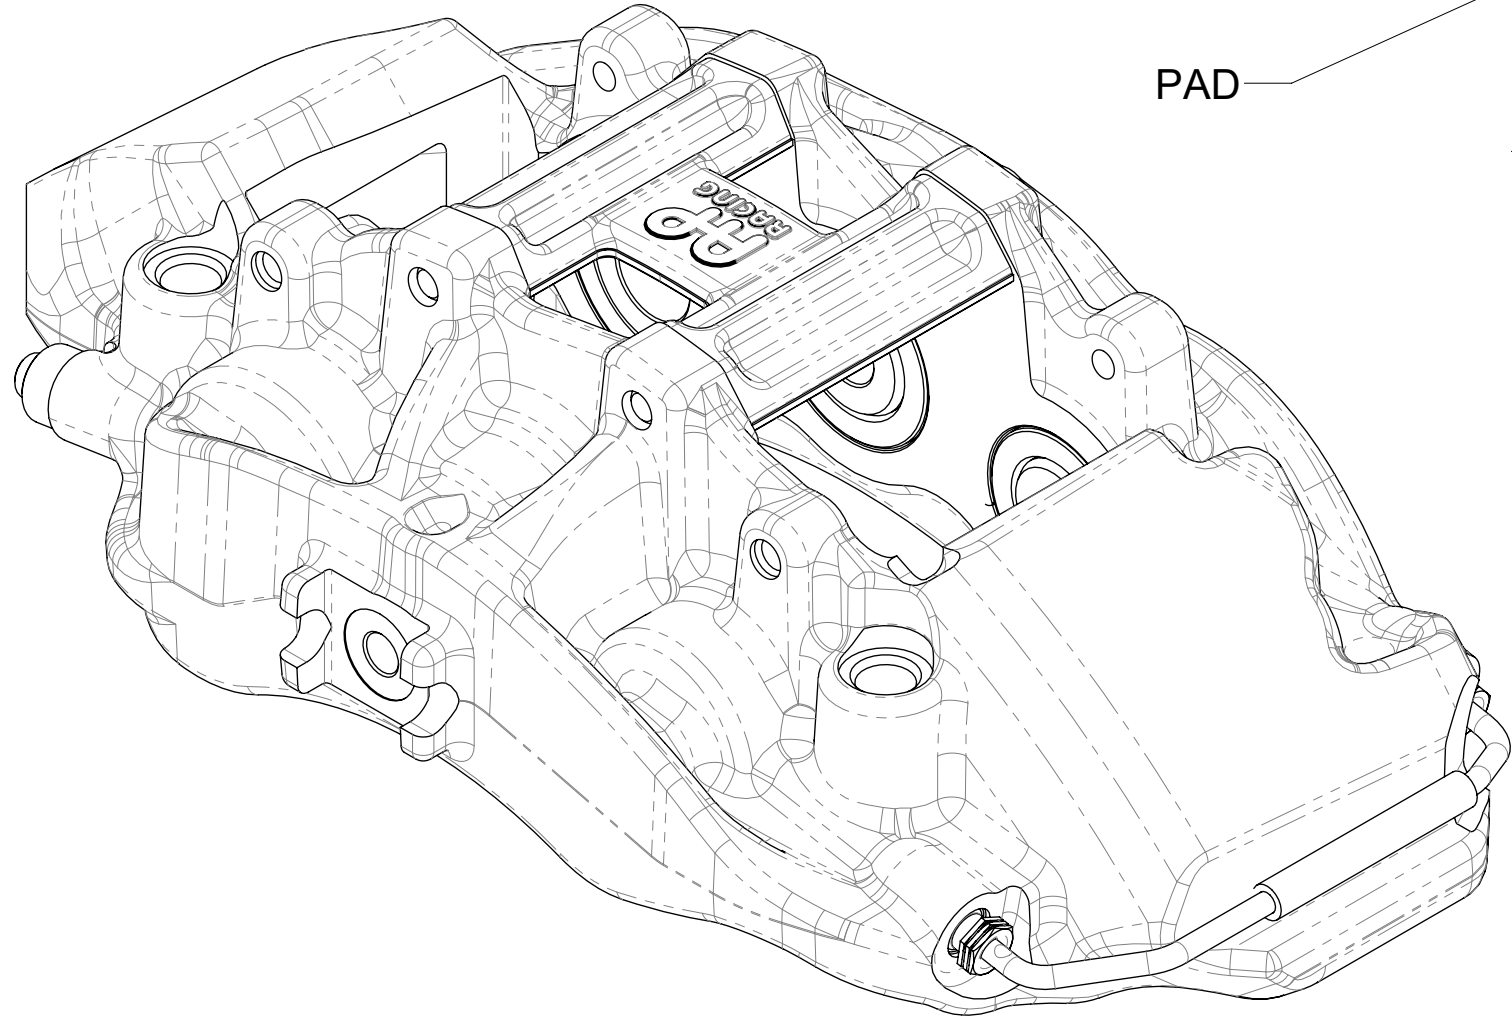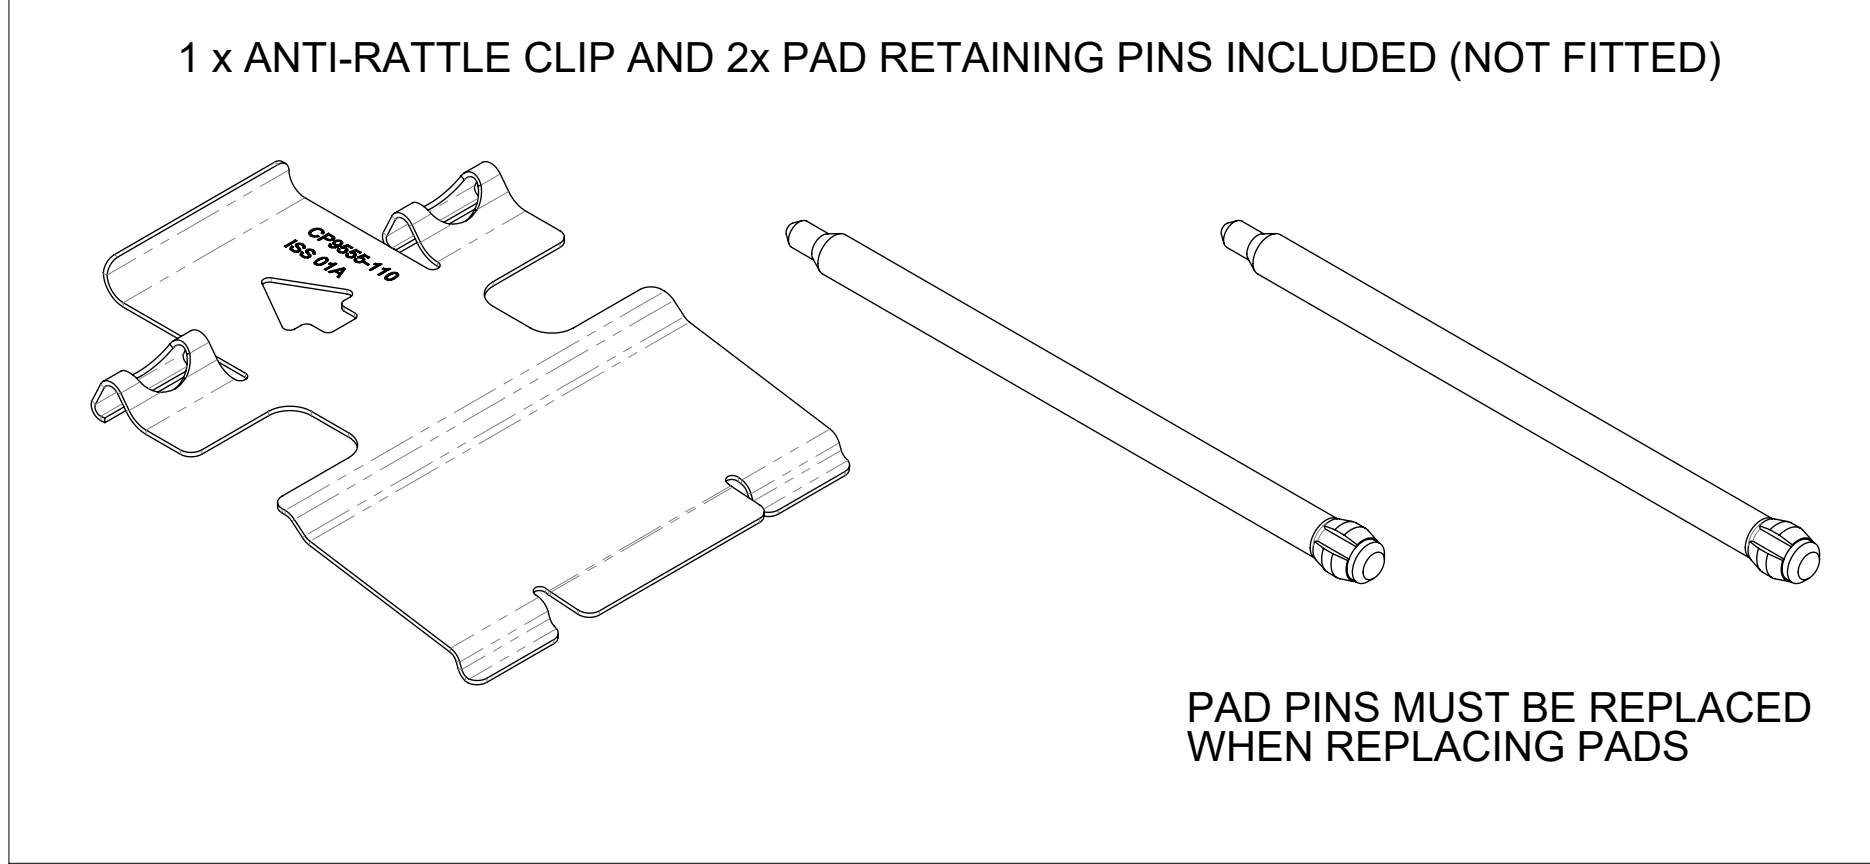

CAUTION - THE EXTERNAL PIPE IS A NON-SERVICEABLE ITEM AND MUST NOT BE TAMPERED WITH UNDER ANY CIRCUMSTANCES.




FEED PORT M10 x 1.0
9.50 MIN FULL THREAD

TYPICAL TIGHTENING TORQUE:

TYPICAL TIGHTENING TORQUE:

- FITTING WITH ONE COPPE

RESULTING MAX TORQUE MUST NOT EXCEED 30NM.

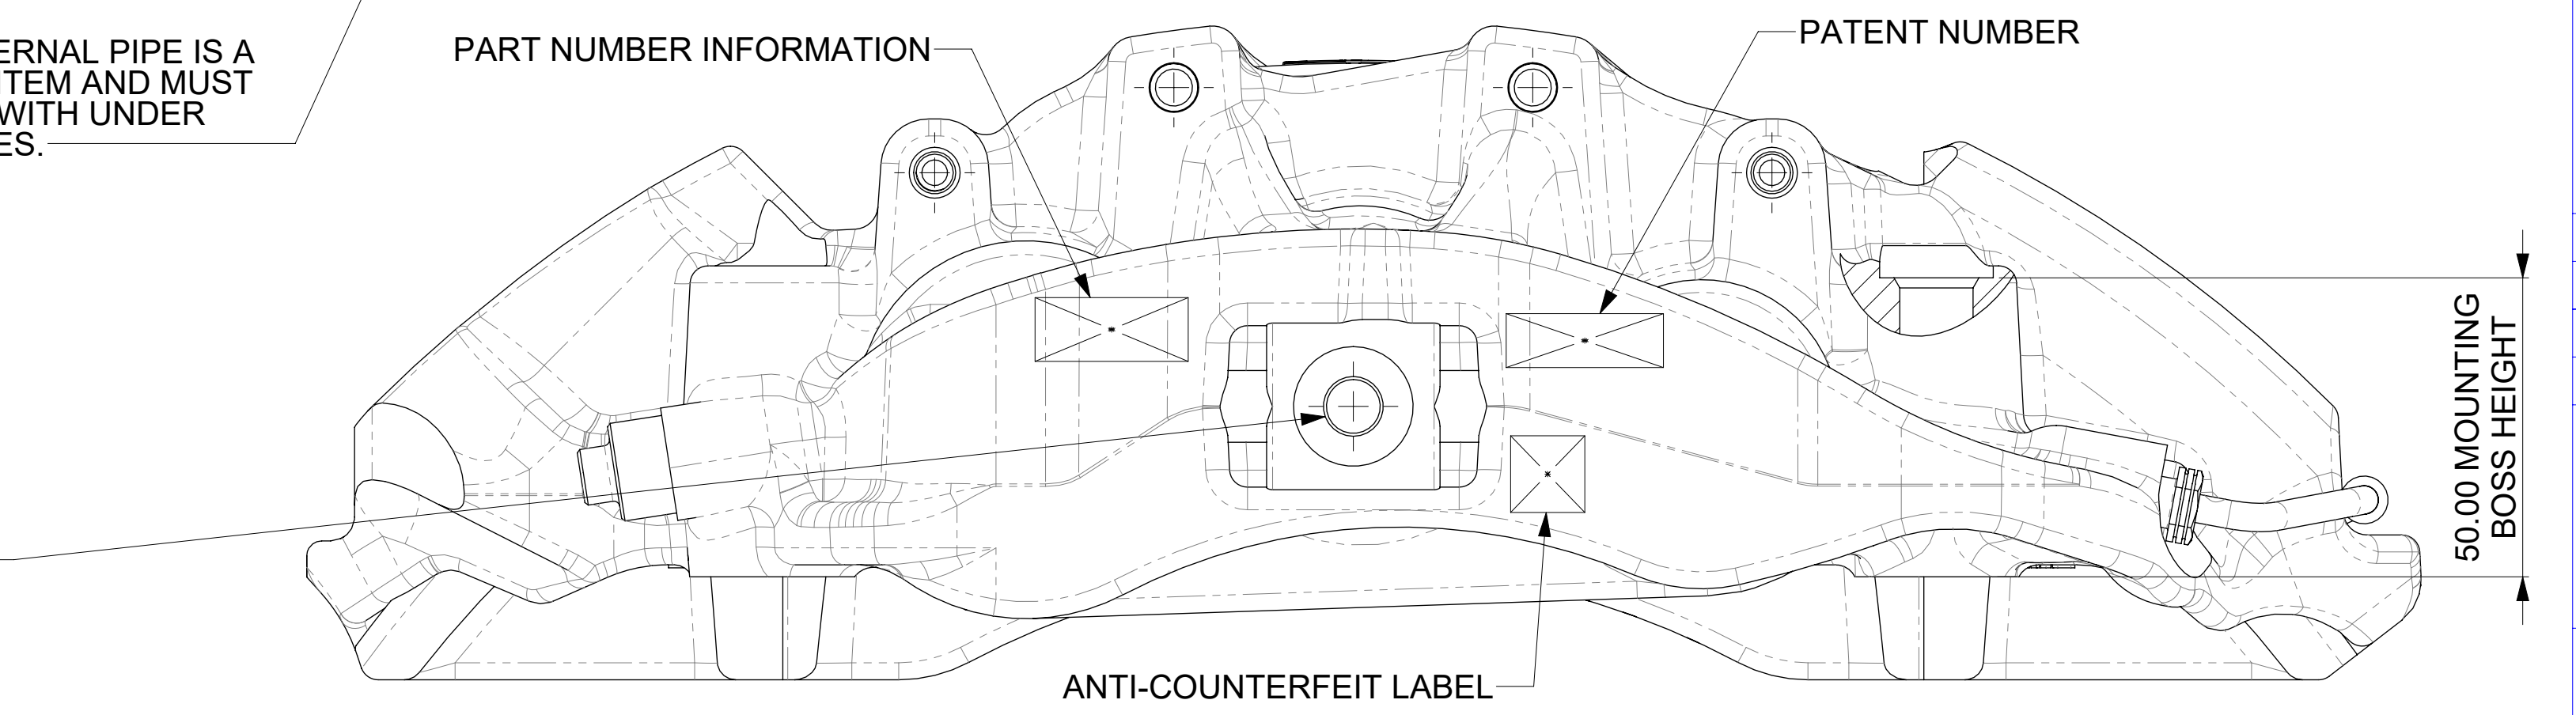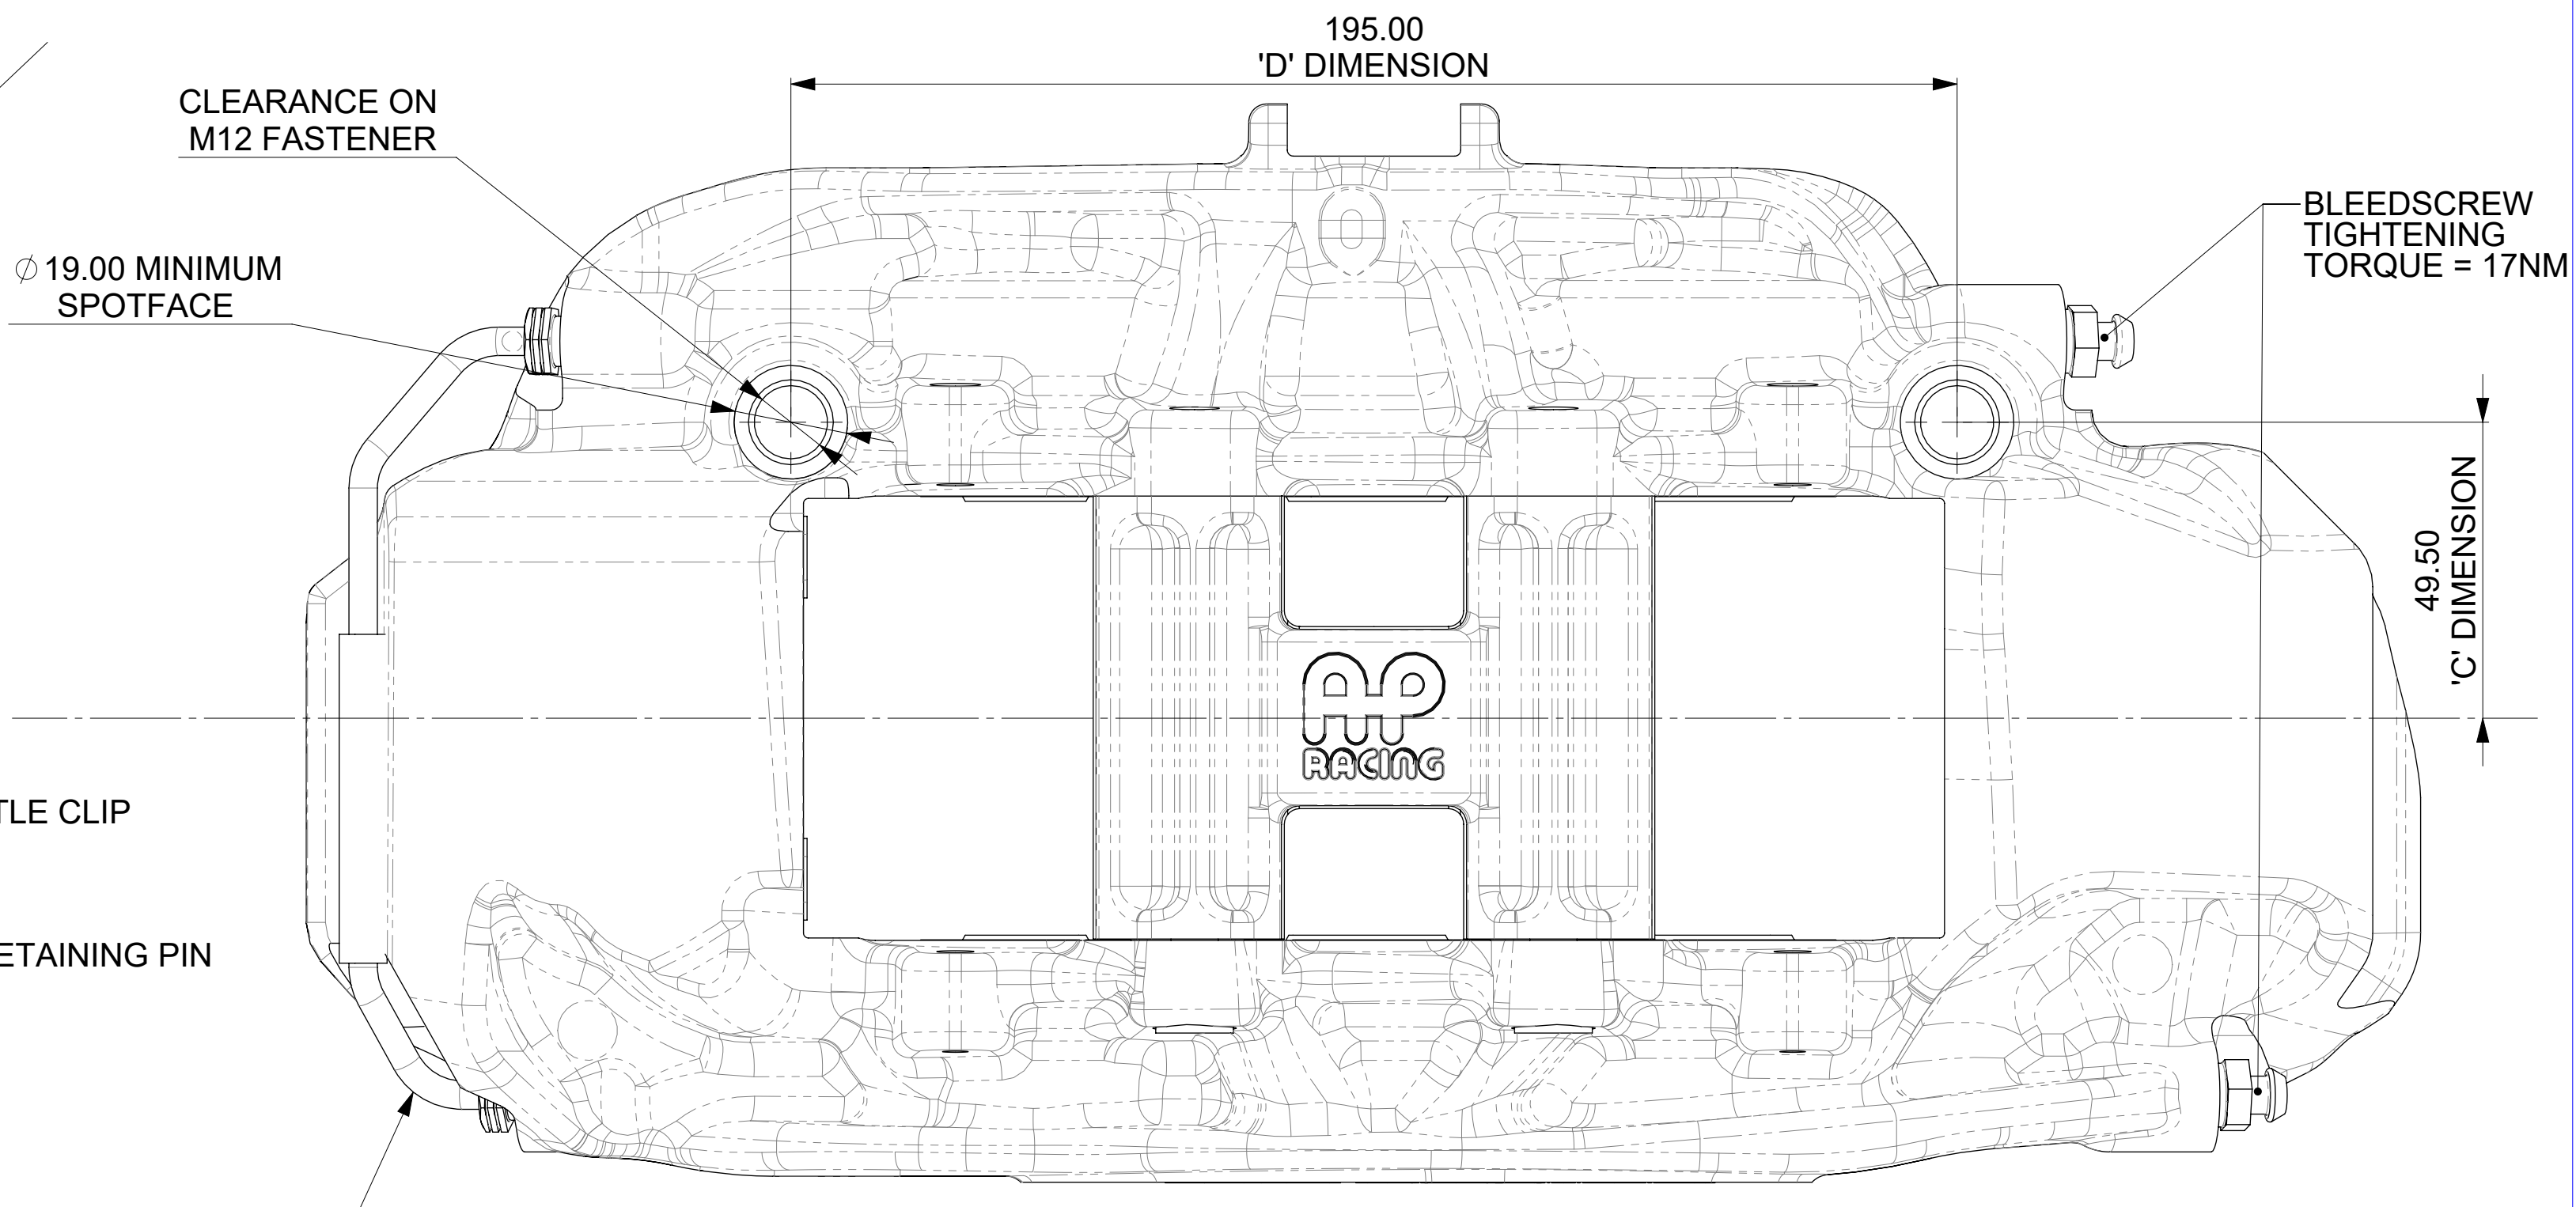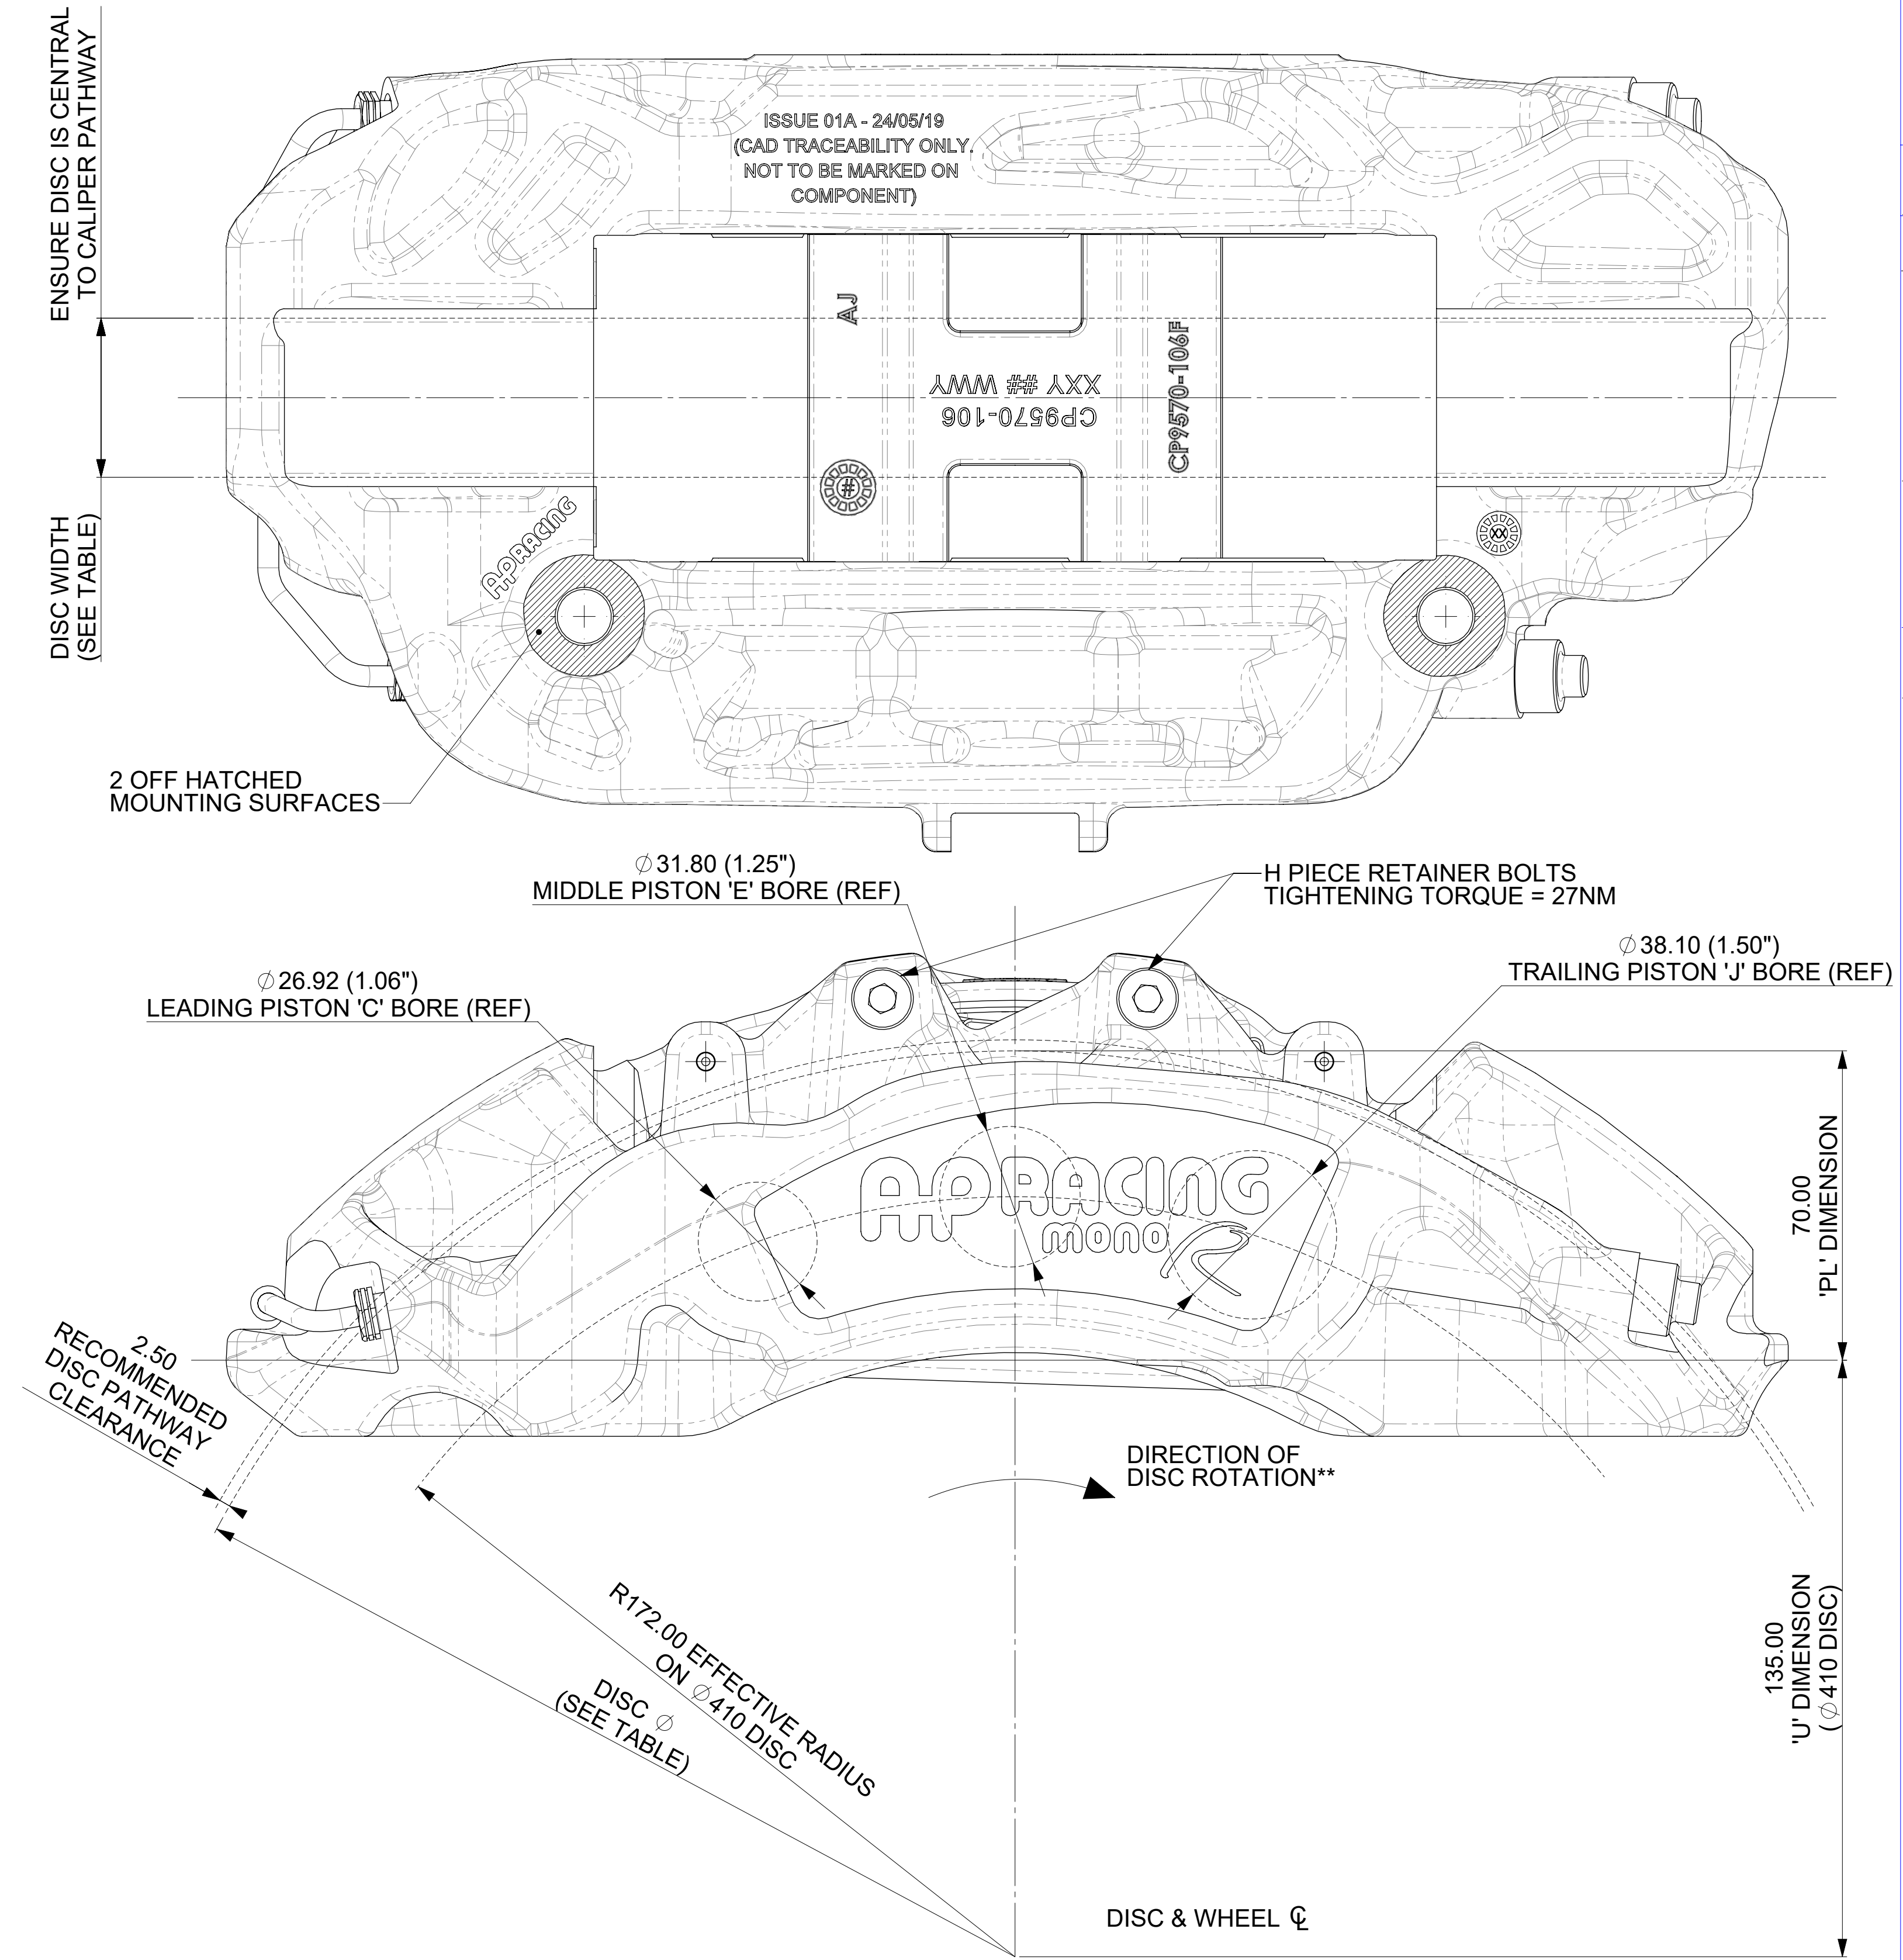

SCALE 1:1		SHEET 1 OF 1	
DRAWN		J.HALEY	
APPROVED			
DERIVED FROM		CP9555-1CD	
TITLE			
6 PISTON HPK MONOBLOC CALIPER			
Ø26.92xØ31.80xØ38.10 PISTON SIZES			
DRG NO.		CP9572-1CD	