

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.co.uk
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP3581-1572 RH AS DRAWN
CP3581-1573 LH OPPOSITE

THIS IS A 48 VANES DISC OF MASS 5.69 Kg ('D' SUFFIX)

SUFFIX TO DISC PART NUMBERS:-




SUFFIX DETAILS
P PLAIN (NO GROOVES)
CGnn CURVED GROOVES AS SHOWN, VALUE nn PER FACE.
eg CG24 MEANS 24 CURVED GROOVES PER FACE.
D 96 CROSSED DRILLED HOLES AS SHOWN
GA 20 'J HOOK' GROOVES PER FACE AS SHOWN

THIS DISC WAS DESIGNED TO WORK WITH A D48 DEPTH PAD

USE BOBBIN No. CP4135-104FD WITH CP3819-108 KAYLOCK NUT TO ACHIEVE 0.40 NOM FLOAT.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

DISC INSTALLATION

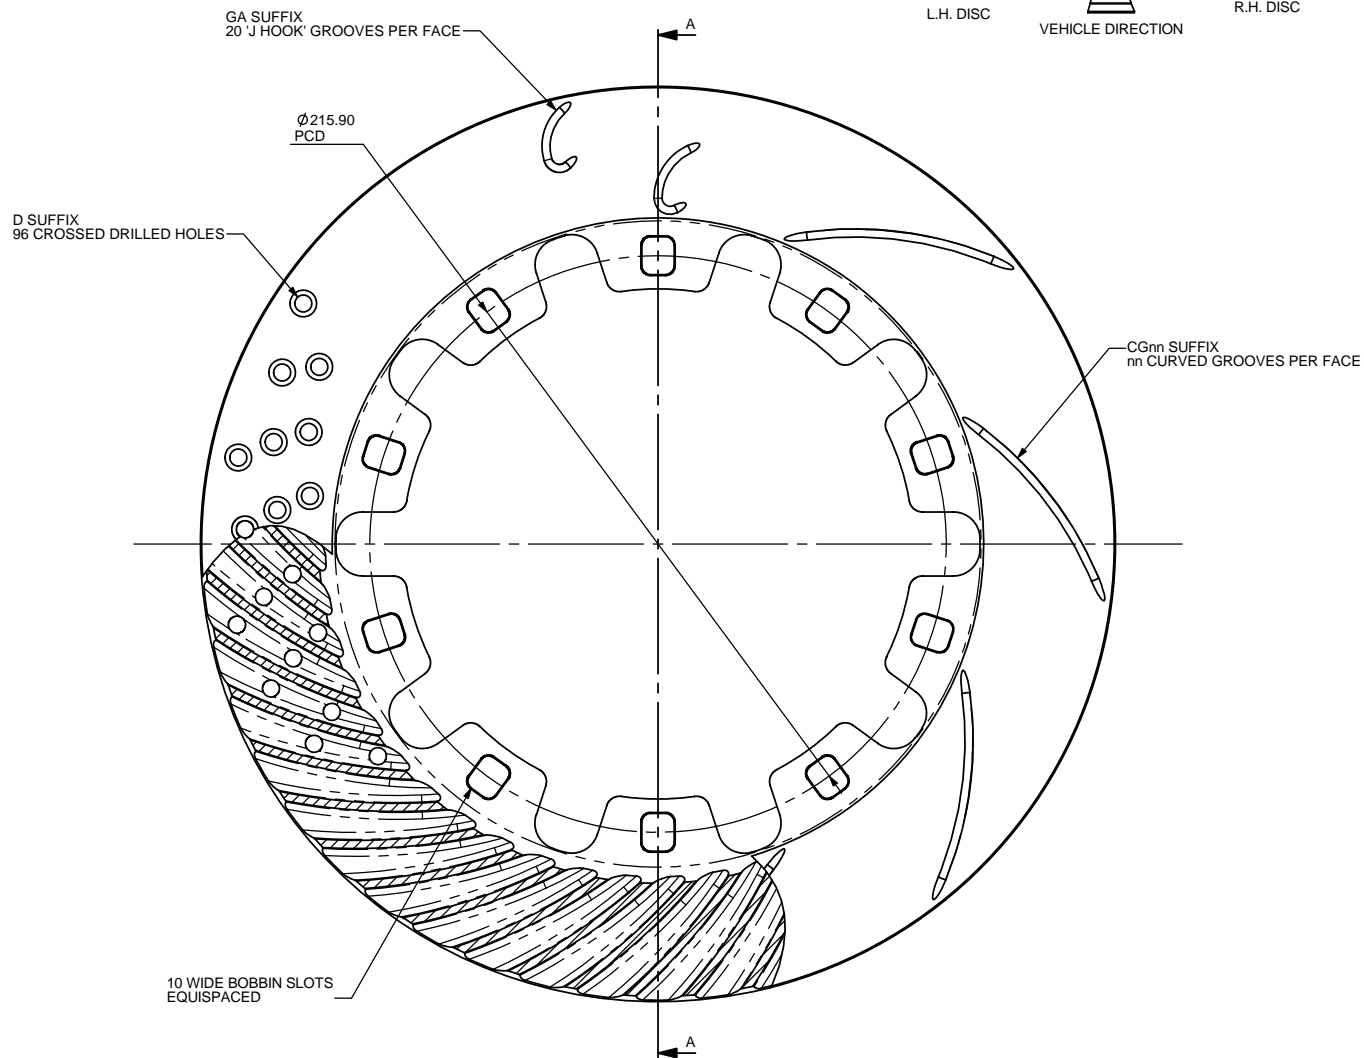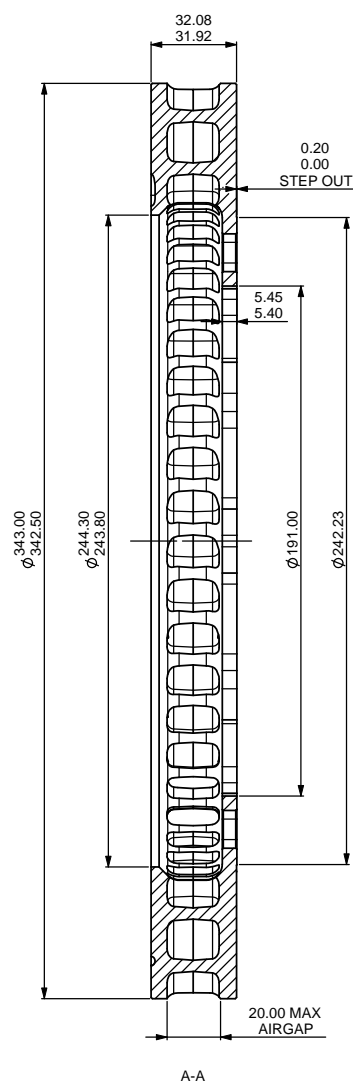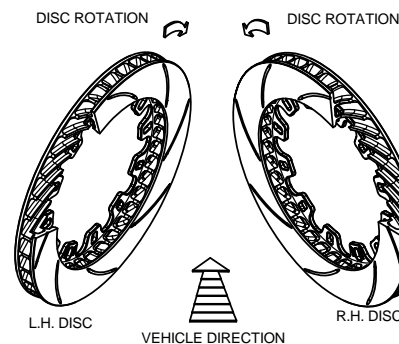

Issue No.	Date & No.	Alterations		Zone	Initials
		Particulars	#		
1	20/06/11 B6249	FIRST ISSUE			

SCALE 1:1	SHEET 1 OF 1
DRAWN	NICK STEVENS
APPROVED	
DERIVED FROM	
TITLE	
$\varnothing 343 \times 32$	
VENTILATED DISC	
DRG NO.	CP3581-1572/1573