

# A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing  
Wheler Road  
Coventry  
CV3 4LB

Tel: +44 (0) 24 7663 9595  
Fax: +44 (0) 24 7663 9559  
e-mail: [engineering@apracings.com](mailto:engineering@apracings.com)  
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

### DISC PART NUMBERS

CP5000-220 RH AS DRAWN  
CP5000-221 LH OPPOSITE

THIS IS A 48 VANE DISC OF MASS 5590.52 g



### SUFFIX TO DISC PART NUMBERS:-

SUFFIX	DETAILS
P	PLAIN (NO GROOVES)
Gnn	STRAIGHT GROOVES AS SHOWN, VALUE nn PER FACE. eg G8 MEANS 8 STRAIGHT GROOVES PER FACE.
CGnn	CURVED GROOVES AS SHOWN, VALUE nn PER FACE. eg CG8 MEANS 8 CURVED GROOVES PER FACE.


THIS DISC WAS DESIGNED FOR A D51 DEPTH PAD.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

### DISC INSTALLATION

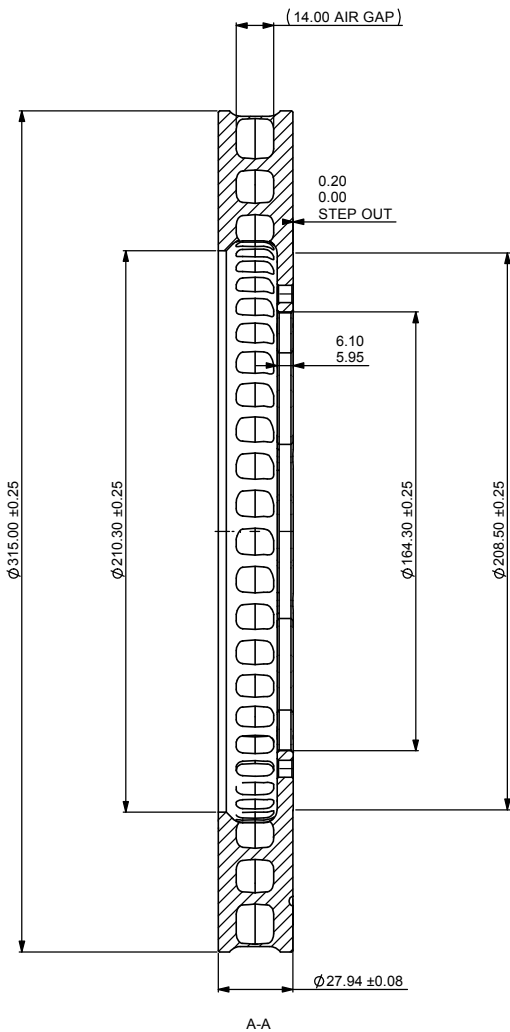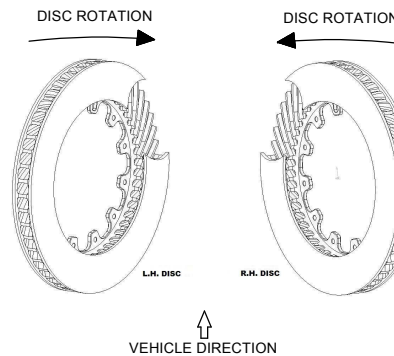

12 HOLES Ø6.425 ±0.025  
EQUI-SPACED ON A PC Ø177.8  
CHF 0.5 x 45° EACH SIDE.

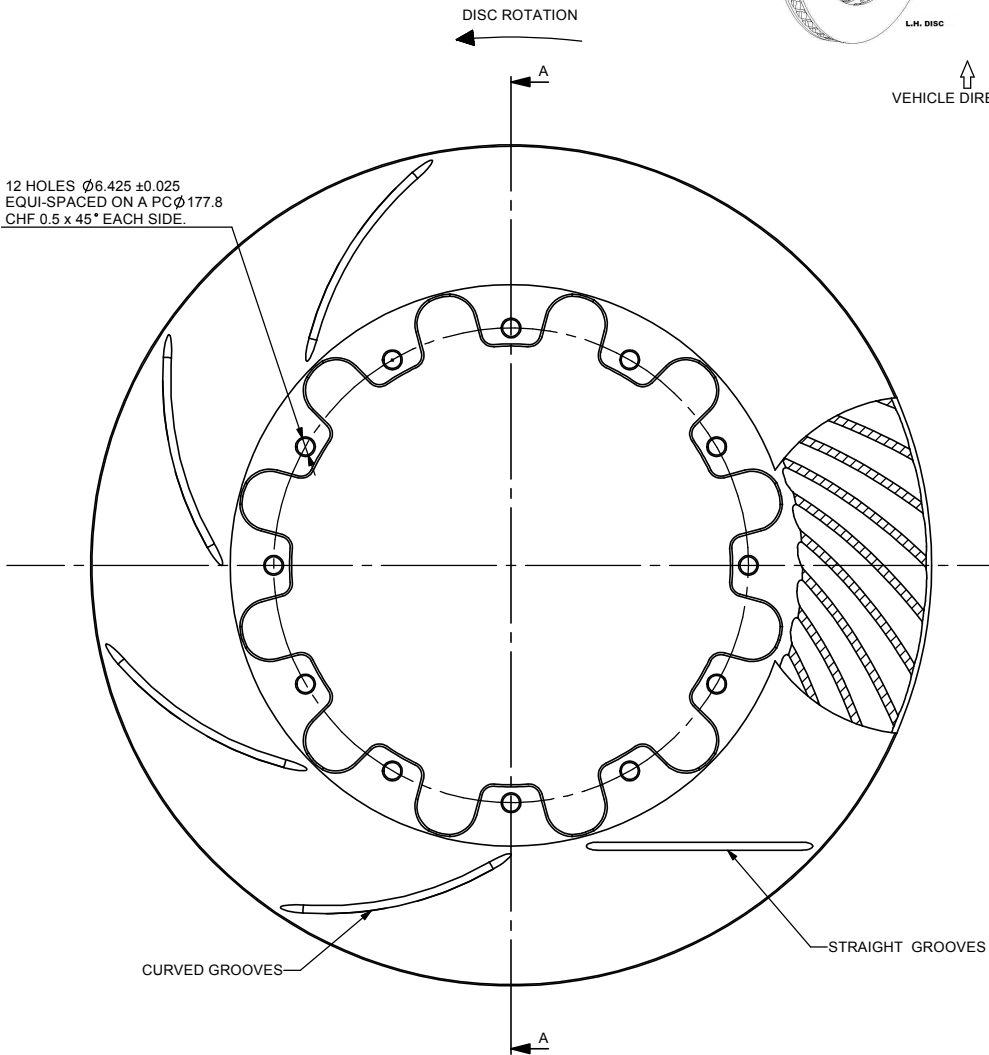

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
1	10/02/2009 B5476	FIRST ISSUE		CDA

SCALE 1:1	SHEET 1 OF 1
DRAWN	Chris Arrowsmith
APPROVED	
DERIVED FROM	CP5000-212/213
TITLE	
Ø315 x 28	
VENTILATED DISC	
DRG NO.	CP5000-220/221CD