


A0 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARD COPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.




AP Racing
Wheler Road
Coventry
CV3 4LB
Tel: +44 (0)24 7663 9595
Fax: +44 (0)24 7663 9599
e-mail: sales@apracings.co.uk
Web site: HTTP://www.apracings.com

© AP Racing Ltd 2016






CALIPER SPECIFICATION	
BORE SIZE	CC (27.00 x 27.00) (1.06" x 1.06")
PISTON AREA	11.45cm ²
DISC DIAMETER MAX	380.00
DISC THICKNESS MAX	28.00
DISC THICKNESS MIN (WORN CONDITION)	26.00 (DIFFERENTIAL WEAR NOT TO EXCEED 0.50mm SIDE TO SIDE)
WORKING PRESSURES	SEE DATA SHEET P14.355 (AVAILABLE FROM AP RACING TECHNICAL DEPT)
HYDRAULIC FEED	M10 x 1.0
DRY WEIGHT (LESS PADS)	3.31kg
PAD FAMILY	CP6600
EFFECTIVE RADIUS (ON DIAMETER 380.00 DISC)	162.50
PL' DIMENSION	55.00
OFFSET 'C' DIMENSION	34.00
MOUNTING HOLE CENTRES 'D' DIMENSION	195.00
PAD FRICTION MATERIAL	
MIN THICKNESS	2.50
PAD RETENTION	2 x FRICTION RETAINED PINS
TIGHTENING TORQUES	BLEED SCREW: 17Nm HYDRAULIC FEED: 25Nm RETAINER BOLTS: 19Nm
CORROSION PROTECTION	FLUID RESISTANT PAINT FINISH ALUMINIUM BODY BOOT TYPE DIRT SEALS

CALIPER POSITIONING	
RHT	RIGHT HAND TRAILING (BEHIND AXLE)
LHT	LEFT HAND TRAILING (BEHIND AXLE)
RHL	RIGHT HAND LEADING (IN FRONT OF AXLE)
LHL	LEFT HAND LEADING (IN FRONT OF AXLE)

PART NUMBERING CONVENTION	
PART NUMBER	DESCRIPTION
CP9542-6S0	RHT - SIDE FEED - NO ANTI KNOCK BACK SPRINGS
CP9542-7S0	LHT - SIDE FEED - NO ANTI KNOCK BACK SPRINGS
CP9542-8S0	RHL - SIDE FEED - NO ANTI KNOCK BACK SPRINGS
CP9542-9S0	LHL - SIDE FEED - NO ANTI KNOCK BACK SPRINGS

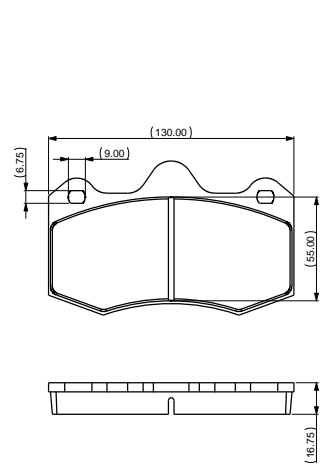

CP6600 PAD FAMILY
PAD AREA (MAX) 64.6cm²

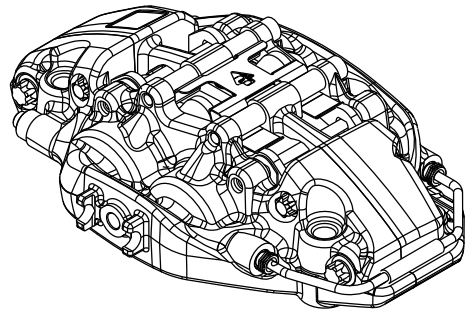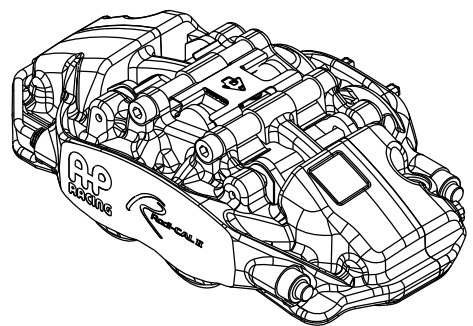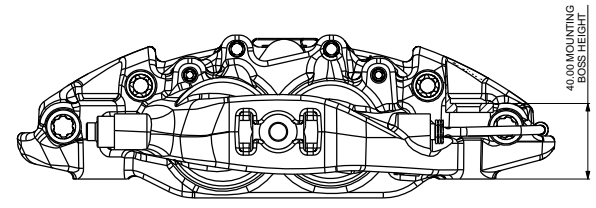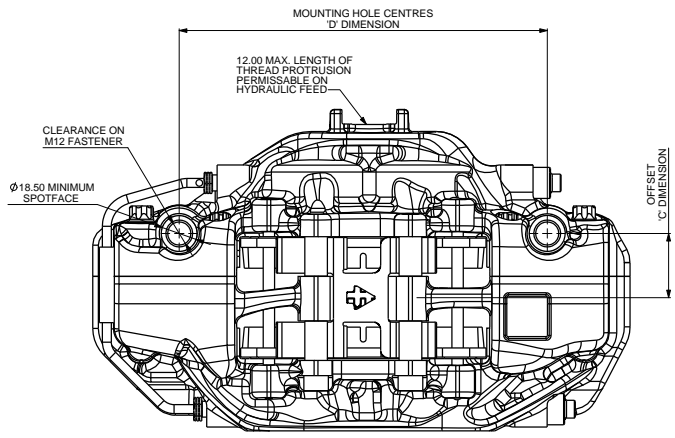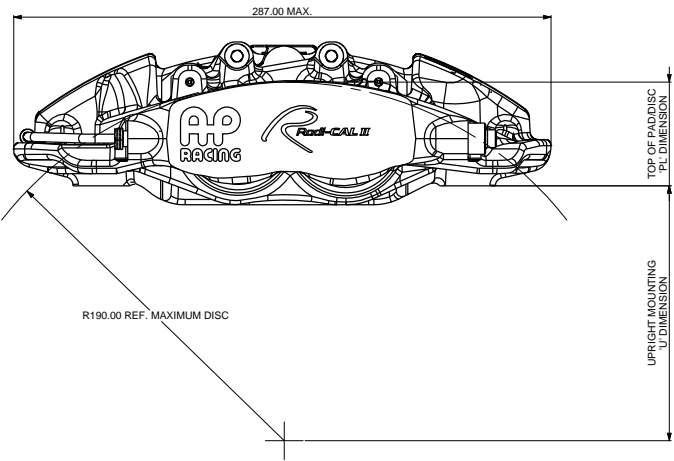


Alterations			
Date & No.	Particulars	By	Checked
25/10/16 R4292	FIRST ISSUE		
06/01/17 R4292	RADIAL PROFILES REFINED (SHEET 2)		
19/08/17 R4292	RETAINER TORQUE UPDATED: WAS 27.1Nm, NOW 19Nm		
17/07/17 R4292	PART NUMBERING CONVENTION TABLE UPDATED WITH CORRECT PART NO'S.		
29/08/18 R4292_17	DRY WEIGHT: 3.31KG ADDED TO CALIPER SPECIFICATION TABLE		

SCALE 1:1	SHEET 1 OF 2
DRAWN ALTHORPE	
APPROVED	
DERIVED FROM	
TITLE CALIPER INSTALLATION DRAWING Ø380 x 28.00 MAX DISC (CC BORES)	
DRG NO.	cp9542-6cd

FOR INSTALLED PROFILES SEE SHEET 2

A0 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE




FIRST ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB
Tel: +44 (0)24 7663 9595
Fax: +44 (0)24 7663 9559
e-mail: sales@apracings.co.uk
© AP Racing Ltd. 2016
Web site: HTTP://www.apracings.com

Alterations		Zone	Index
Date & No.	Particulars		
-	SEE SHEET 1 FOR ISSUE INFORMATION.	-	-

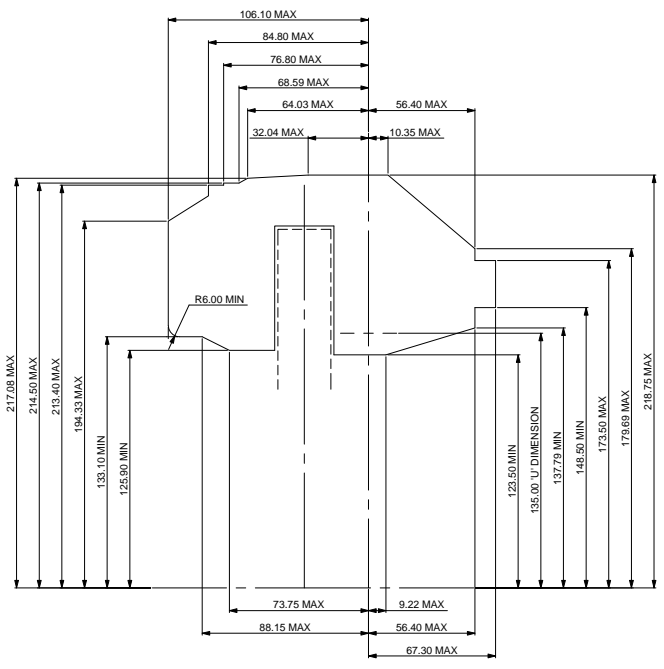

CALIPER INSTALLED PROFILE
ON Ø380.0 x 28.00 DISC

SCALE 1:1	SHEET 2 OF 2
DRAWN	ALTHORPE
APPROVED	
DERIVED FROM	
TITLE	
CALIPER INSTALLATION DRAWING	
Ø380 x 28.00 MAX DISC (CC BORES)	
DRG NO.	cp9542-6cd