

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.com
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP5772-1136 RH AS DRAWN
CP5772-1137 LH OPPOSITE

THIS IS A 72 VANES DISC OF MASS 7.84 KG.

THIS DISC WAS DESIGNED TO WORK WITH D54 DEPTH PADS.



USE BOBBIN CP2494-589MJ TO ACHIEVE STANDARD DISC FLOAT OF 0.45 / 0.35.

SUFFIX TO DISC PART NUMBERS:


SUFFIX DETAILS

RA SET OF J HOOK GROOVES AS SHOWN BREAKING THROUGH OD. NUMBER OF SETS CORRESPONDS TO NUMBER OF MOUNTINGS.

FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

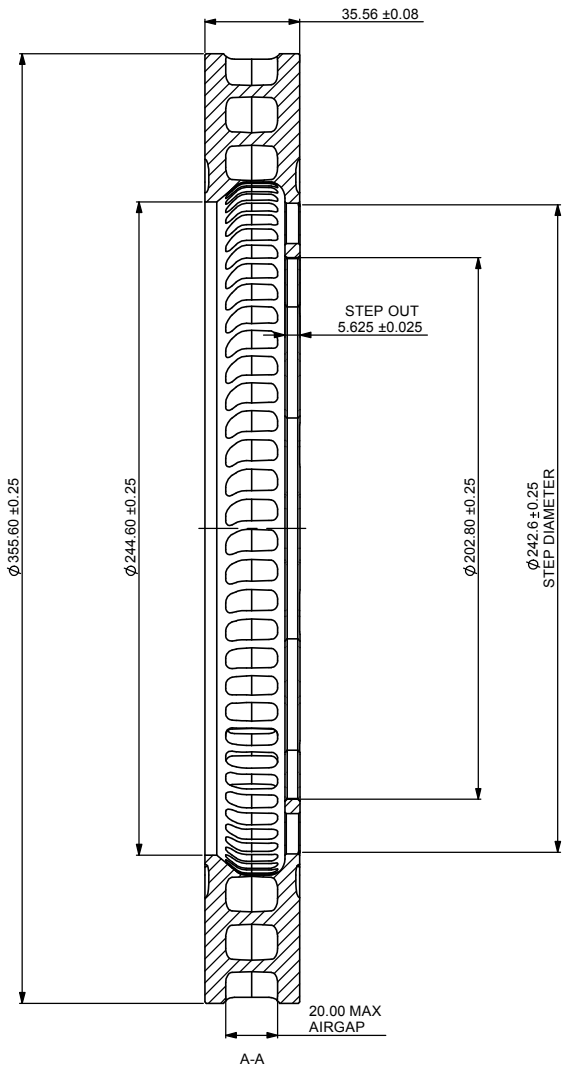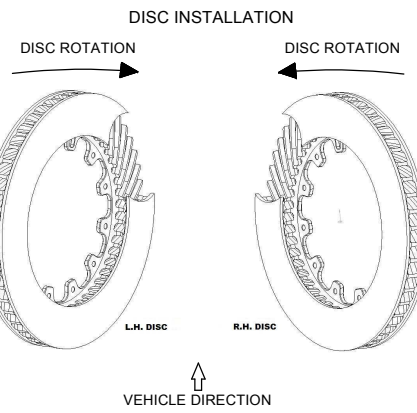

DISC MOUNTING
PC Ø228.60

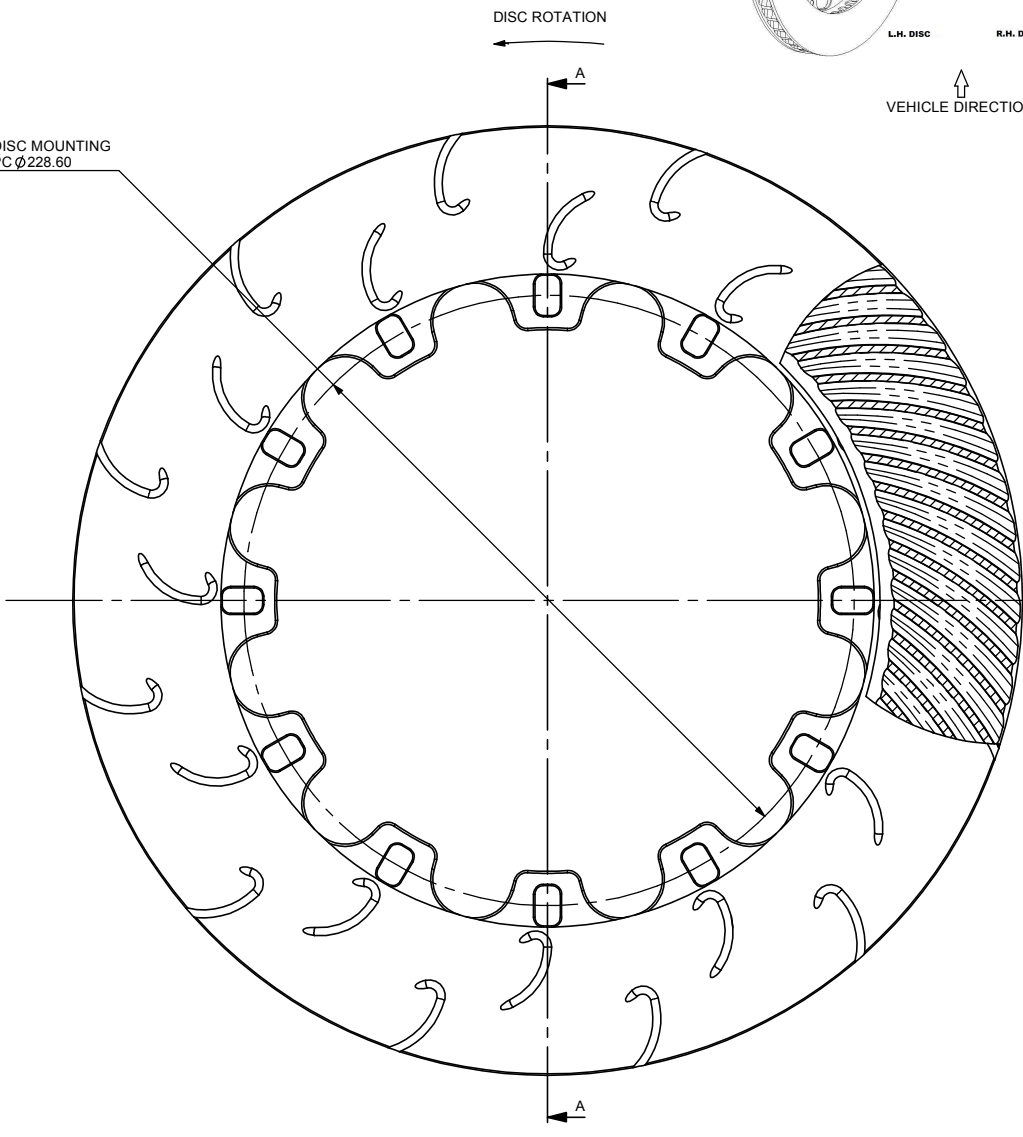

Issue No.	Alterations		Zone	Initials
	Date & No.	Particulars		
1	30/01/02	FIRST ISSUE	#	SAT
2	26/07/07 34460:ID59	0.20 / 0.10 STEP OUT ADDED Ø242.6 ADDED	#	DRA

SCALE 1:1		SHEET 1 OF 1	
DRAWN	Steve Thomas		
APPROVED			
DERIVED FROM			
TITLE			
VENTILATED DISC			
Ø355.6 x 35.56 - 72 VANES			
DRG NO.	CP5772-1136 / 1137 CD		